










BODY REPAIR

Solutions





CHOOSE YOUR HEADLIGHT ADJUSTER PROPERLY.

Points to watch

Before choosing a headlight adjustment device, there are several questions to ask yourself:

- What type of vehicle am I likely to be working on? LV, LCV, HGV, motorcycle?
- How often do I use it?
- do I have a dedicated place in my workshop for this service, and does my location meet the requirements, or do I need to clear the area accordingly? (e.g. laying a rail if it's not flat).

The different types of light in an optical compartment:

- halogen light
- xenon light
- LED light
- laser light
- "intelligent" light




LEARN MORE

MATRIX - DLA - ILS : Added segments


The evolution of headlights has led automobile manufacturers to create lighting modules with different construction characteristics.

The projections established by current regulations remain unchanged (low, high and fog lights), but a fourth projection must be controlled depending on the vehicle manufacturer.

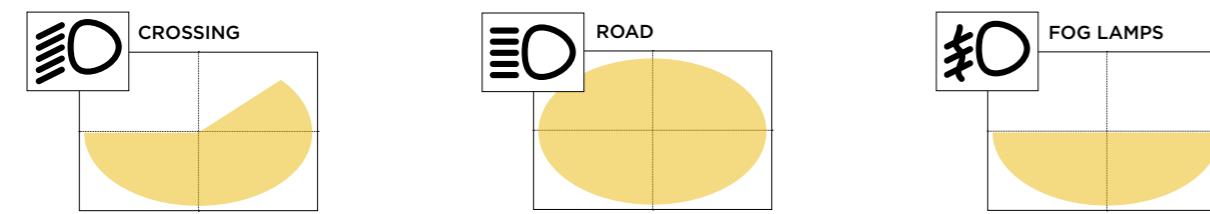


Adjustment: diagnostics takes over

If segments have been added to the vehicle, the prerequisite for adjusting and checking the position is to connect to the control unit via diagnostics at the ODB socket and set the adjustment mode. The reference parameters for adjusting the segments to be added are defined by the car manufacturer and the vehicle being tested. Any operation carried out on the segments without connecting to diagnostics will be cancelled when the vehicle is started up.

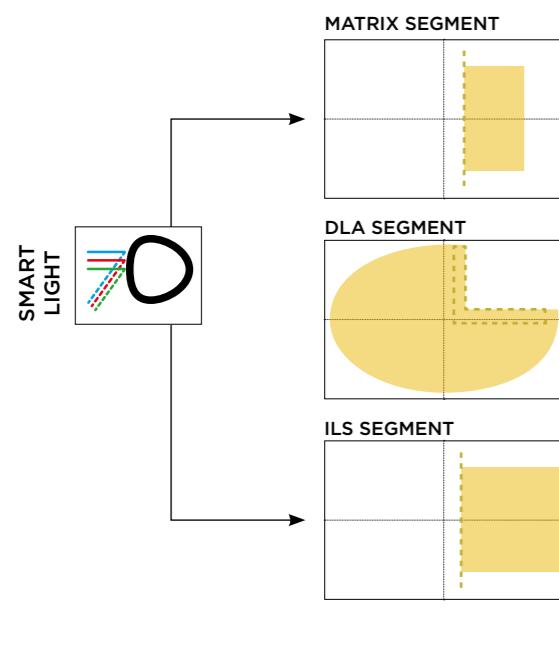

Update 2020: new segments!



With the evolution of cars, and indeed of their headlamps, new segments have recently appeared, and our AC 3010 headlamp adjuster will enable you to adjust them.

Reminder: the headlamp needs to be updated annually. If you purchased your device before 2020, these new segments will be available with the update.




COMPARATIVE OVERVIEW



REF	AC 2005BL	AC 2013	AC 3010
Vehicle type			
Intensity of use			
Aligner	Miroir	Double laser	Double laser
Beam reading	Sight	Sight	Camera
Digital luxmeter	Yes	Yes	Yes
Power supply	9V battery	1.5V x3 + 9V battery	12V battery
Light type	Halogen, Xenon, Led	Halogen, Xenon, Led	Halogen, Xenon, Led, Matrix led, Laser
Screen type	Digital	Digital	5.7° color LCD touchscreen
Optional rail	No	Yes	Yes



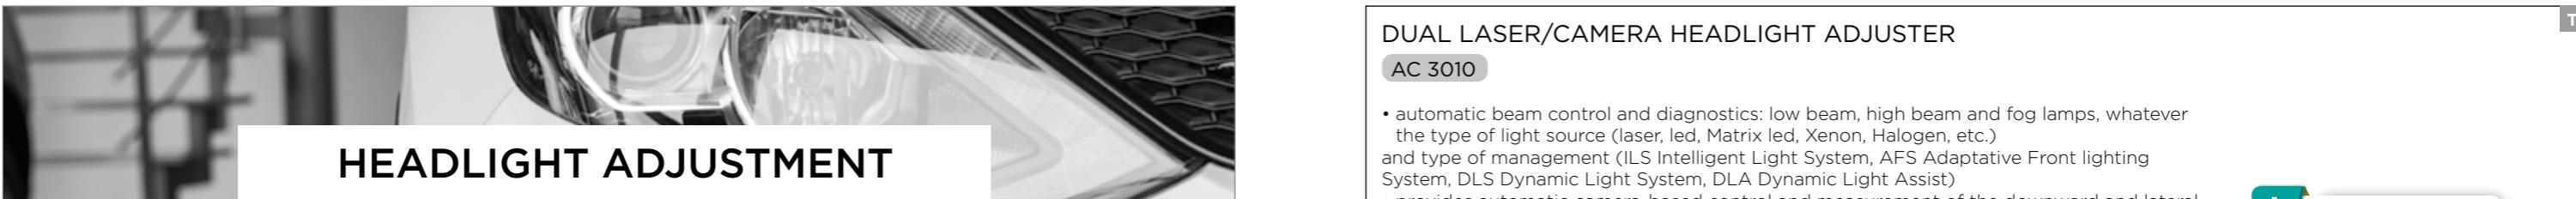

HEADLIGHT ADJUSTMENT

STANDARD HEADLIGHT ADJUSTMENT DEVICE

AC 2005BL

Functions :

- 0-4% drawdown measurement and control
- lateral adjustment control $\pm 5\text{cm}/10\text{m}$
- light output measurement 0-150klux/1m, 0-240lux/25m
- intervention on Code, Full and Fog light beams from light sources (Xenon, Halogen, LED...)



Specifications:

- mirror-type aligner
- digital luxmeter
- aluminum column (removable) graduated from 20 to 150cm
- sliding adjustment mechanism
- metal case with adjustable inclination
- power supply: 9V battery (included)
- dimensions: L.712xW.580xH.1810mm

DUAL LASER HEADLIGHT ADJUSTMENT DEVICE

AC 2013

Functions :

- 0-4% drawdown measurement and control
- lateral adjustment control $\pm 5\text{cm}/10\text{m}$
- lighting power measurement 0-150klux/1m, 0-240lux/25m
- intervention on headlights (Xenon, Halogen, LED...), fog lights

Specifications:

- laser-type aligner (SA2037) compliant with EN 60825 standard
- digital luxmeter
- removable aluminum column graduated from 20 to 150cm
- sliding adjustment mechanism
- thermoplastic housing with adjustable inclination
- laser aligner power supply: 3 x 1.5V batteries (included)
- dimensions: L.712xW.580xH.1810mm
- UTAC NFR 63801 standard

+
Precise laser
adjustment
to the
optics



DUAL LASER/CAMERA HEADLIGHT ADJUSTER

AC 3010

- automatic beam control and diagnostics: low beam, high beam and fog lamps, whatever the type of light source (laser, led, Matrix led, Xenon, Halogen, etc.) and type of management (ILS Intelligent Light System, AFS Adaptive Front lighting System, DLS Dynamic Light System, DLA Dynamic Light Assist)
- provides automatic camera-based control and measurement of the downward and lateral beam. It also measures lighting power.
- cross laser housing centering.
- UTAC NFR 63-801 compliant

+
Suitable for 100% of
fire types



Flash to see the full
description!



Specifications:

- measuring range:
0-6% (accuracy +/- 0.1%)
Lateral 0-10% (accuracy +/- 0.2%)
- luminous intensity: 150kcd
- 360° rotating Aluminum column
- counterweight rise-and-fall
- 3-axis inclinometer electronically compensates for ground irregularities
- adjustable castors compensate for large differences in floor level
- case height sensor
- 5.7" color LCD touchscreen
- integrated printer: registration no./date/test result
- 12V rechargeable battery
- automatic sleep mode
- quick and easy software updates (via USB key)
- connections: RS232
- communication protocols: Net1, Net2
- dimensions: L.695xW.660xH.1780mm

SA 9924 DUAL LASER/CAMERA HEADLIGHT ADJUSTER SET-UP

SA 9925 HEADLIGHT AC 2013/AC 3010 CALIBRATION



HEADLIGHT RESTORATION

3" MINI POLISHER KIT

Ø75mm

OP 1429

Specifications:

- speed: 3,200 rpm
- platen diameter: 75mm
- thread: M6x100
- consumption: 170l/min
- length: 115mm



Supplied with fitting



SA 1429 75mm VELCRO SANDING PAD

BEFORE



AFTER



WINDSHIELD WIPER

WINDSCREEN WIPER REMOVER


OC 1700BL

B.LINE
BUDGETSOLUTION

This wiper blade remover offers an efficient and safe solution for removing wiper arms, even when heavily oxidized or jammed on their axle. Its compact geometry makes it easy to work in the cramped areas encountered daily in workshops.



Very small footprint

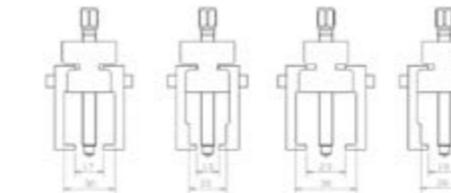

2
WARRANTY

WINDSCREEN WASHER NOZZLE CLEANING

TOOL
EG 0002



NO
WARRANTY

UNIVERSAL WINDSCREEN WIPER EXTRACTOR

OC 1710



Telescopic adjustment of the thrust screw.

Contents:

- 4 cage extractors Ø26-30mm/Ø31-35mm/Ø36-40mm/Ø36-46mm, inside 45mm, hexagonal drive 12mm
- 1 claw extractor 18-40mm inside, 45mm inside, 12mm hex drive

TN

2
WARRANTY



GLASS REPAIRING

WINDSCREEN REPAIR KIT

OC 2203



Consumables and retail kit components



TN

NO WARRANTY

Contents:

- resin kit (10 pipettes)
- filler 5 ml
- polish 10 ml
- ball-tipped glass drills x 5
- pressure/vacuum piston with syringe
- 3.6 V glass drill with charging cable
- 2-in-1 repair bridge
- razor blades x 5
- square polymerization films x 5
- carbide tip
- mirror with adjustable suction cup

REPAIR RESIN 10ml

OC 2202

TN



NO WARRANTY

CARBIDE BIT Ø1mm

OC 8067

TN



NO WARRANTY

FINISH RESIN 5ml

OC 8064

TN

OC 2203 component



NO WARRANTY

PIPETTE RESINS - LOT OF 10 UNITS

OC 2503

TN




NO WARRANTY

GLASS REPAIR FINISHING POLISH

OC 2504



TN



NO WARRANTY

INJECTOR AND SYRINGE FOR RESINS

OC 2507

TN



NO WARRANTY

WINDSHIELD REPAIR KIT


OC 2501



Repair windscreens impacts and cracks efficiently with this kit. Designed for garages and glazing specialists, it contains all the tools and consumables needed for fast, precise and long-lasting repairs.


Advantages:

- Fast, reliable repair, avoiding complete windshield replacement
- Complete, ready-to-use kit
- Optimized storage in a rigid, ergonomic case

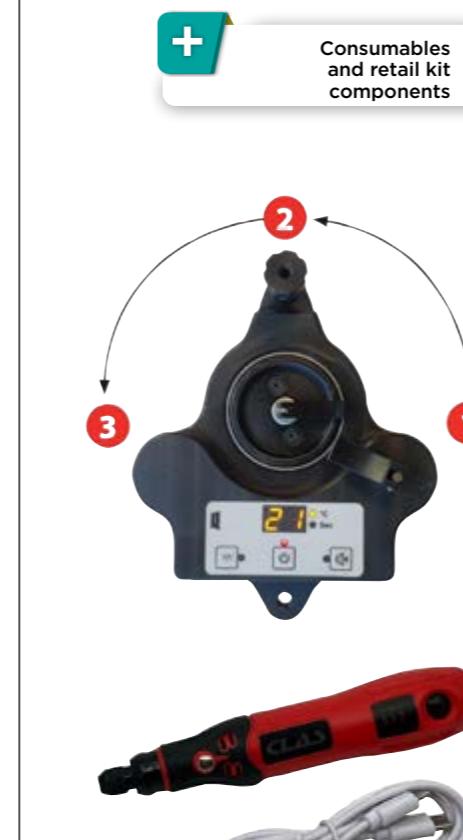

Contents:

- 3-in-1 repair bridge
- 3.6 V glass drill with charging cable
- Spherical-tip glass drills (x5)
- Pressure/vacuum plunger with syringe
- Sliding hammer
- Square polymerization films (x5)
- Razor blades (x5)
- Adjustable suction-cup mirror
- Syringe and needle
- Gel 10 ml
- Polish 10 ml
- Pit filler 5 ml
- Crack resin 5 ml
- Kit storage box
- Lighter
- 220 V adapter
- Resin kit with pipettes (10 pipettes)
- Crack resin kit (includes pressure/vacuum plunger, syringe + needle, crack resin)
- Filling kit (includes razor blades, square films, filling resin)

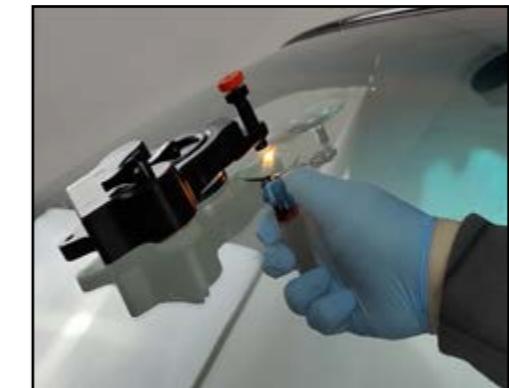



RATCHET WINDSHIELD CUTTER

OC 6498

Accessory for OC 2900/OC 4500/OC 0600/OC 0200/OP 0500/OP 0714/OP 5060/OC 2100/OC 3100/OC 3401/OC 1100

Thanks to its nylon thread, this single-suction pump kit enables windscreens to be removed without damaging the seals, so there's no need to dismantle them. The seal is cut by pulling a wire (or cable) activated by a ratchet system. Thanks to its compact size, this suction pad can be used on windscreens, rear windows and rear quarter windows. Easy to use, it enables rapid intervention (a few minutes) by a single operator, with no physical effort required. This tool has been approved by a large number of vehicle manufacturers.



1 single operator and effortless cutting



Specifications:

- universal: compatible with nylon and steel wire (all types: braided, square and triangular)
- 200kg pulling capacity (compared to 100kg for steel wire)
- up to 8 cuts before changing nylon wire

Contents:

- single-suction ratchet cable-pulling system
- 25m nylon wire reel
- OC4100: windshield grommet
- safety glasses

2 WARRANTY

HAND CUTTER FOR WINDSCREEN CUTTING

OC 0200

Ergonomic sheathed knife for cutting the windshield seal by pulling the blade.

Specifications:

- metal-clad
- flexible T-shaped pull handle

OC 7025 25mm BLADE SET (5 PCS)



Supplied with 25mm blade

NO WARRANTY

PNEUMATIC KNIFE

OP 0500


- oscillations/min: 20000
- length: 192mm
- supply pressure: 6.2bar
- consumption: 113l/min
- net weight: 1kg



OP 0508	SCRAPER BLADE 8mm	Accessoire de OP 0500
OP 0535	STRAIGHT BLADE 35mm	Accessoire de OP 0500
OP 0536	U-SHAPED BLADE 36mm	Accessoire de OP 0500
OP 0557	STRAIGHT BLADE 57mm	Composant de OP 0500
OP 0590	STRAIGHT BLADE 90mm	Accessoire de OP 0500


HOLLOW STARTING NEEDLE

OC 4500

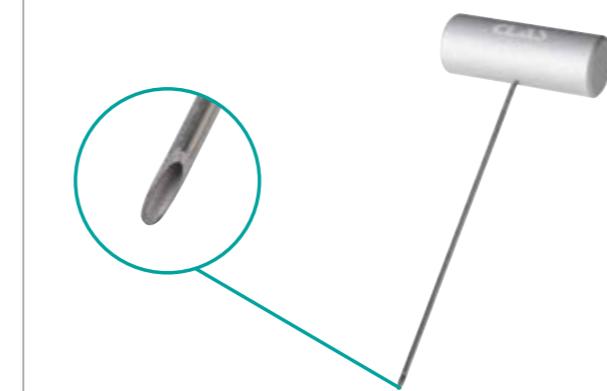

WIRE THREADER

OC 4100

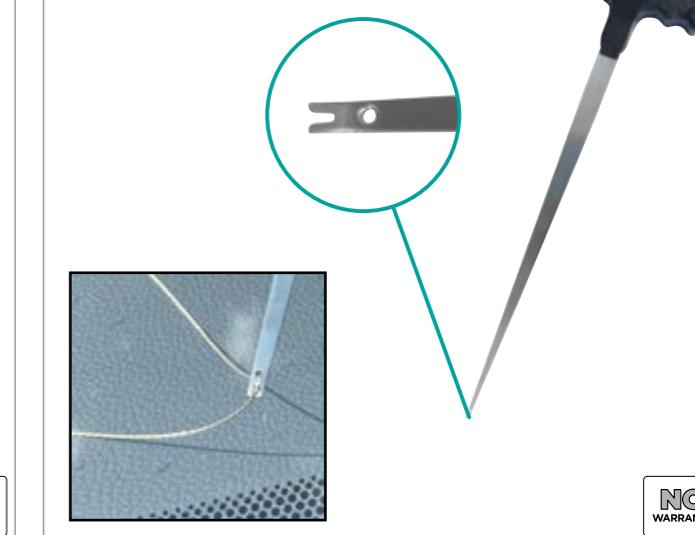

TN

SAWING WIRE 0.8mmx0.8mmx44m

OC 2100




TN

WIRE GUIDE

OC 6000

Flat length 75mm

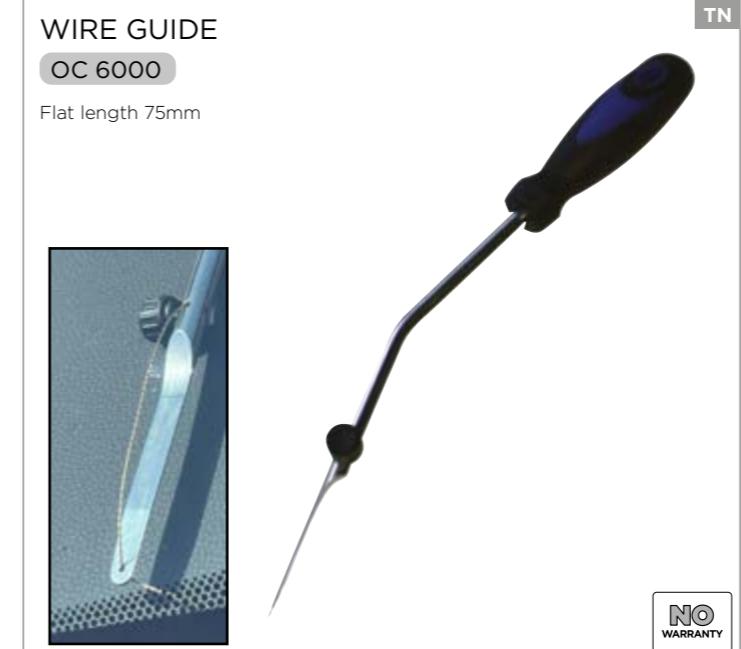

Specifications:

- strength: 110kg / 1078N

44 m

NO WARRANTY

NYLON WIRE DRAWER 50m

OC 1100



Specifications:

- pulling force: 200kg
- reusable up to 8 times

50 m

SQUARE CUTTING WIRE 0.7mmx0.7mmx44m

OC 3100



TN

Specifications:

- strength: 95kg / 931N

44 m

NO WARRANTY



FIND ALL GLASS CUTTING RANGE HERE

FIND ALL GLASS CUTTING RANGE HERE



KIT OF 4 WINDSCREEN PROTECTORS

OC 1409



TN

PAIR OF PULLING HANDLES

OC 2900

Quick-lock handles



TN

2
WARRANTY

2-HANDLE LINE CUTTER KIT

OC 1500

A set of 2 handles is used to pull the cable inserted in the joint with the needle.



TN

Contents:

- OC4500: hollow leader needle
- OC2100: braided wire reel 0.8mmx0.8mmx44m
- OC2900: pair of grip pull handles

44 m

ROPE INSERTION TOOL

OC 0501



Insertion rope length: 6m

6 m

For unglued windscreens.

WINDSCREEN GASKET ROLLER TOOL

OC 0502

With its various Nozzles, it enables the installation of seals.



For unglued windscreens.

TN

NO
WARRANTY

RETRACTABLE SCRAPER

OC 0305



RETRACTABLE SCRAPER + 100 BLADES

OC 0306

Composition:
OC0305 : 1 x racloir retractable
OC5497 : 1 x lames a racler 100 piecesBlade width: 38mm
Blade height: 19mm

WINDSHIELD GASKET TOOL ROUND END ELBOW

OC 3350

Round-ended hook for cleaning broken glass.



TN

NO
WARRANTY

SCRAPER AND UTILITY KNIFE SET

OC 0302



Contents:

- 1 cutter
- 1 scraper
- 5 straight blades 12mm (OC5301)
- 5 straight blades 16mm (OC5302)
- 5 straight blades 20mm (OC5303)
- 5 beveled blades 16mm (OC5304)
- 5 trapezoidal blades (OC5305)

SCRAPER WITH HANDLE + 100 BLADES

OC 0303

Blade width: 38mm
Blade height: 19mmComposition:
OC0304 : 1 x racloir a manche
OC5497 : 1 x lames a racler 100 pieces

OC 0304 SCRAPER WITH HANDLE

TN

NO
WARRANTY

UNIVERSAL GEL FOR ATTACHING RAIN SENSOR/LIGHT SENSOR (single dose)

OC 2204



100 WINDSCREEN PREPARATION TOOL SET

OC 0301



TN

NO
WARRANTY



WINDSHIELD REPAIR ROLLER CABINET


EG 9988

Contents can be used for free-standing and bonded windscreens, as well as for impact repair.

You can work in different ways:

- with the cutting knife, using manual traction
- with single- or 2-operator ropes

The servo unit is ideal for creating a windshield-dedicated business, with an ergonomic, all-in-one workstation.

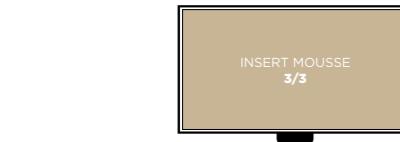

Contents:

- EG1007: 7-drawer trolley
- drawer 1 conventional hand tool
- OS3700: 1/4" ratchet insert
- OS3900: 1/2" ratchet insert
- OS4020: combination wrench insert
- drawer 2
- OS1304BL: screwdriver insert
- drawer 3
- OC1409: 4-piece dashboard protectors
- OC 2204 Universal Rain Sensor/Highlight Gel x5
- OC5071: cartridge gun
- drawer 4 windshield cutting inserts OC3351
- SA9987: Windshield Cutting Foam Insert

- OC0302: Scraper and Cutter Set
- OC0200: Gasket Cutting Knife
- OC7025: Box of 5 25mm Blades
- OC7038: Box of 5 38mm Blades
- OC2900: Pair of Pull Handles
- OC2100: Braided Wire Reel
- OC3100: square wire feeder
- OC6000: Wire Locking Lever
- OC4100: Wire Passing Tool
- OC304: Handle Scraper
- OC5497: 100 Piece Trimmer Blades
- drawer 5 Windshield Intervention Insert OC3352
- OC0501: Rope Insertion Tool
- OC0502: Windshield Mounting Tool

- OC8078: 5-piece Nylon Spatula Kit
- OC1700: Wiper Blade Remover
- EG0002: Washer Nozzle Cleaning Tool
- OC0600: Pair of Suction Cups
- OC3350: Angled Round Butt Joint Tool
- drawer 6
- OC2203: Windshield Repair Kit
- OC8067: Carbide Bit
- side storage
- EG8001: Metal Workshop Bin
- OC3360: 50m Adhesive Film



TN



GLASS CUTTING


INSERT WINDSHIELD CUTTER

OC 3351

The OC 3351 insert brings together all the tools needed to cut windscreens safely and precisely.

Designed for bodywork and glazing professionals, this kit offers a complete selection of sturdy, ergonomic tools for removing windscreens without damaging bodywork or seals.

Each item is carefully packed in high-density foam for optimum organization and durability.




2 WARRANTY

TN

GLAZING INTERVENTION INSERT

OC 3352

Complete insert intervention glazing



2 WARRANTY

TN

ADHESIVE FILM GLASS PROTECTION TRANSPARENT 500x60cm 0.75mm

OC 3360

Total film length: 50 m

Film width: 60 cm

Roll diameter: 11.5 cm

Film thickness: 75 micrometers



NO WARRANTY

TN



FIND ALL GLASS REPAIRING RANGE HERE

FIND ALL GLASS HANDLING RANGE HERE



PNEUMATIC GUN FOR 370mm CARTRIDGES AND BAGS

OP 5060

For the application of silicone, glue and mastic in 310ml cartridges and 300, 400 and 600ml cartridges.



Specifications:

- noise level: 80dB
- Aluminum body and ring
- total length 470mm
- length: 370mm
- height: 270mm



Supplied with fitting and plastic spout



CARTRIDGE AND BAGS GUN 340mm 12:1

OC 5071

For the application of silicones, adhesives and sealants in 310ml cartridges and 300 and 400ml cartridges.



Supplied with 1 SA5065 plastic spout

Specifications:

- Aluminum handle, body and ring
- ratio: 12:1
- max thrust: 4000Nm
- overall length: 340mm

TN

AIR CAULKING GUN

OP 5061

For the application of silicone, glue and mastic in 310ml cartridges.



Supplied with fitting



12 CRIMPING NOZZLES 6-12mm Ø15x1,5mm L.100mm

CO 1050

Output width: adjustable from 6 to 12 mm
Offset adjustable from 0 to 9 mm
Right/left cut-out possible

12 V-SHAPED NOZZLES 10mm Ø15x1,5mm L.58mm

CO 1052



SET OF 12 TAPERED NOZZLES Ø15x1,5mm L.105mm

CO 1056



TN

SCREEN ADHESIVE CARTRIDGE 290ml

CO 1041

For fast bonding of windshields, rear windows, quarter windows, etc.

Specifications:

- MS polymer
- integrated primer
- application width: 10 to 14mm
- drying: 2 hours through core (at 20°C)
- hardness: SHORE 60



TN

Also available in box of 12

GLASS HANDLING

ELECTRIC SUCTION CUP 210 MM 130 KG

OC 0690



Designed for glazing and bodywork professionals, this electric suction pad ensures a secure hold thanks to its autonomous suction, which is always stable and powerful without any intervention.



Specifications

- product dimensions: 200 mm
- safe traction force: 130 kg
- power supply: 3.7 V lithium battery
- type-C charging interface
- battery capacity: 1200 mAh*1
- charging time: 3 hours
- autonomy: 4 hours
- battery life without charging: over a week
- safe traction force: 130 kg
- battery compartment at the rear, allowing lithium batteries to be replaced at any time



130 KG




ASSEMBLY/DISASSEMBLY TOOL - 1 OPERATOR

OC 2502



Simplify windshield installation with this tool, specially designed to enable a single operator to handle and position the glass precisely and safely. Thanks to its robust suction pad and articulated arm system, this equipment ensures reliable windshield support while reducing physical effort.

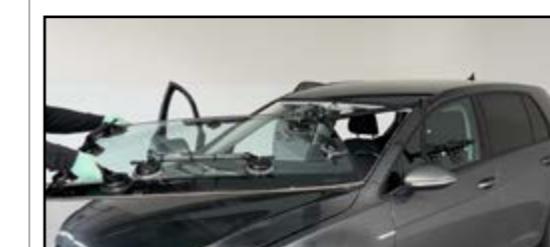

120 KG

TN

Specifications:

- One-person operation saves time and optimizes workshop resources
- High-adhesion suction cups for secure glazing support
- Articulated arm for precise, damage-free positioning
- Compatible with most light vehicles
- Ideal for body and glazing professionals
- Maximum capacity of 120kg





PAIR OF SUCTION CUPS Ø120mm

OC 0600

Essential for free-standing and bonding all types of windscreens.

Working
comfort**Specifications:**

- toggle suction cups to adapt to different window shapes
- lever locking
- handling handle
- capacity: 120kg
- suction cups Ø120mm
- supplied with quick-release ratchet strap
- strap length: 5m

**Contents:**

- SA6958: Ø120mm suction cups
- SA6959: 5m ratchet strap


120KG

PAIR OF SUCTION CUPS Ø140mm

OC 0611

Optimize your handling operations with this pair of Ø140 mm professional suction cups, designed to provide a secure grip and excellent adhesion on all types of glazing and smooth surfaces.

Sturdy, reliable and ergonomic, they are ideal for glazing, bodywork and the installation of glass, metal or composite components.

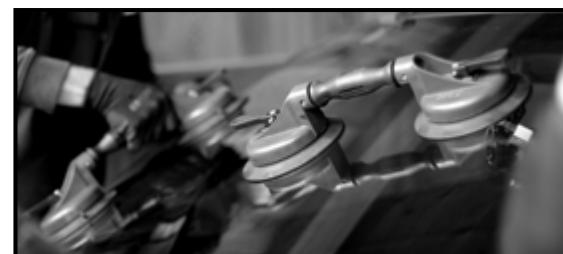


Increased safety

**Specifications:**

- toggle suction cups to adapt to different window shapes
- lever locking
- handling handle
- capacity: 120kg
- overflow suction cups Ø140mm, for better grip

**120KG**

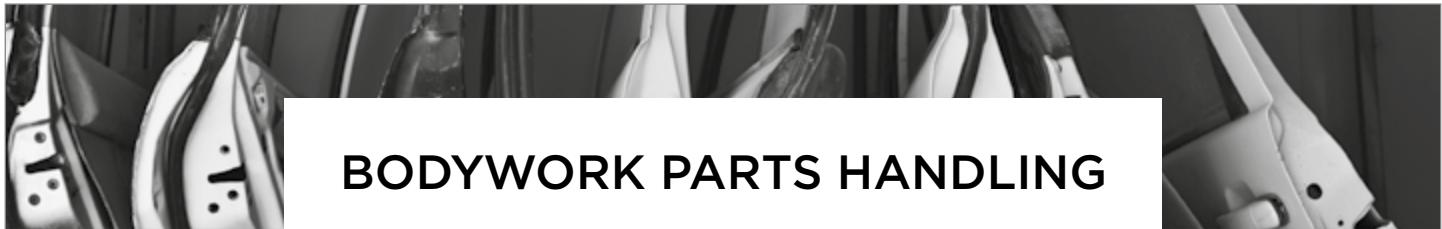

BODYWORK PARTS HANDLING

TN

BODYWORK STAND WITH TARPAULIN

OC 0724

This multi-purpose folding mobile easel is ideal for all bodywork and glazing jobs.

Equipped with a canvas to hold tools or other items, it can also be used to protect parts such as hoods, bumpers, fenders, etc...



Foam protection



Specifications:

- capacity: 270kg
- folding galvanized steel frame (Ø32mm x 1.2mm)
- height: 1040mm
- width: 1080mm
- working range from 680 to 1040mm (adjustable chains)
- PU support plug
- weight: 6.4kg

270



ADJUSTABLE BODYWORK TRESTLE TOOL TRAY

OC 0723

Foldable easel specially designed to support body parts (hood, doors, bumpers, etc.)
Integrated tool tray



Specifications:

- Width adjustment: from 25 to 71 cm
- Height adjustment: from 100 cm to 120 cm
- Structure: corrosion-resistant, powder-coated steel
- Integrated tool tray: 905 x 294 x 75 mm - ideal for keeping tools and small parts close at hand
- Maximum load: 180 kg

Easy storage: foldable structure saves space in the workshop





FIND THE ALL BODYWORK PARTS HANDLING RANGE HERE

UNIVERSAL TELESCOPIC BODYWORK STAND 23-138cm

OC 0716



+ Does not scratch paint

Specifications:

- width: 23 to 138cm
- height: 84 to 132cm
- rubber-coated, non-slip support
- support length: 86cm
- support width: 8cm
- capacity: 100kg
- 4 swivel wheels, 2 with brakes

Max. Kg
100
1320
840 mm

TN

TN

PARTS/WINDSCREEN/COVERS DOLLY

OC 6041



Specifications:

- independent, sliding support rods, foam cladding
- support rod height: 570mm
- 6 modular compartments for secure workpiece storage
- length: 1200mm
- width: 700mm
- height: 775mm
- equipped with 2 braked wheels
- Ø wheels: 90mm

Max. Kg
150



FIND THE ALL BODYWORK PARTS HANDLING RANGE HERE



MULTI-PURPOSE BODYWORK SUPPORT

OC 0726

Multi-purpose bodywork support, adjustable to fit a wide range of parts such as bumpers, doors, hoods, fenders...

+ Foldable for easy storage



TN

2 WARRANTY

BUMPER WALL BRACKET

OC 0727

Support for 4 bumpers of different sizes.
Locking system for fixed position or wall storage.
Keeps bumpers safe after painting.
Maximum capacity per shelf 60kg.



+ Can be folded back against the wall



TN

2 WARRANTY

MULTI-POSITION SUPPORT SHOCK ABSORBER

OC 0729

Multi-position bumper support.
Fully adjustable in width, depth and height

+ Adjustable



TN

2 WARRANTY

Specifications:

- length: 1940-2040mm
- width: 300-600mm
- height: 1300mm

Max. Kg
150

2 WARRANTY



FIND THE ALL BODYWORK PARTS HANDLING RANGE HERE



ROTATING PAINT RACK 2 RIMS

OC 0728

360° rotating easel for painting wheel rims.
Adjustable in width and height from 980-1420 mm
For rims from 15" to 22".



Specifications:

- length: 1360 mm
- width: 600 mm
- height: 980-1420 mm

50

BODYWORK 3 TRAY STORAGE TROLLEY

OC 0711

Allows storage of dismantled parts such as headlamps, seat cushions, dashboards, bumpers...



Specifications:

- 3 trays (2 wood and 1 mesh)
- tray heights: 260-810-1390mm
- mesh bottom
- 4 swivel wheels, 2 with brakes
- dimensions: L.630xL.1110xH.1625mm

100

BODYWORK SUPPORT

OC 0711

Fully adjustable to fit a wide range of parts such as doors, hoods, fenders...




Specifications:

- length: 960mm
- width: 780mm
- height: 165mm

40

FIND THE ALL BODYWORK VEHICLE HANDLING RANGE HERE

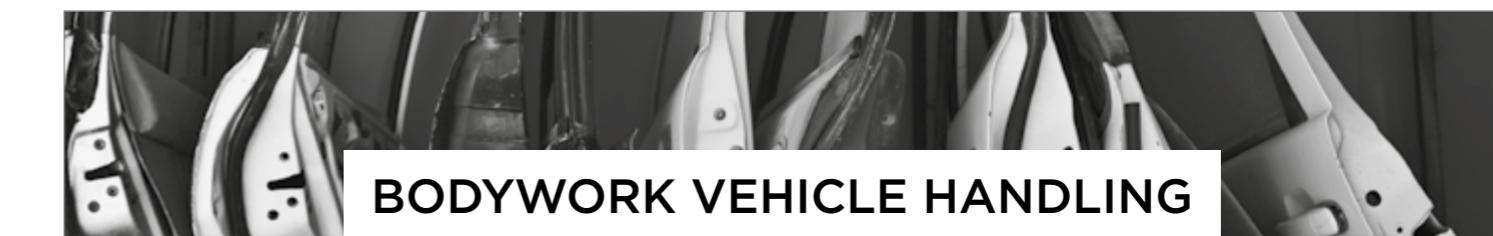


BODYWORK VEHICLE HANDLING

PAIR OF MECHANICAL TROLLEYS 2 X 590kg

OM 2034

Ideal for effortlessly moving vehicles that have broken down or are parked in tight spaces.

You can move parked, broken-down or other vehicles using one or two pairs of carts simultaneously. These carts will not only save you a considerable amount of time when handling vehicles, but will also enable you to optimize space in your garage or workshop - all without any effort.

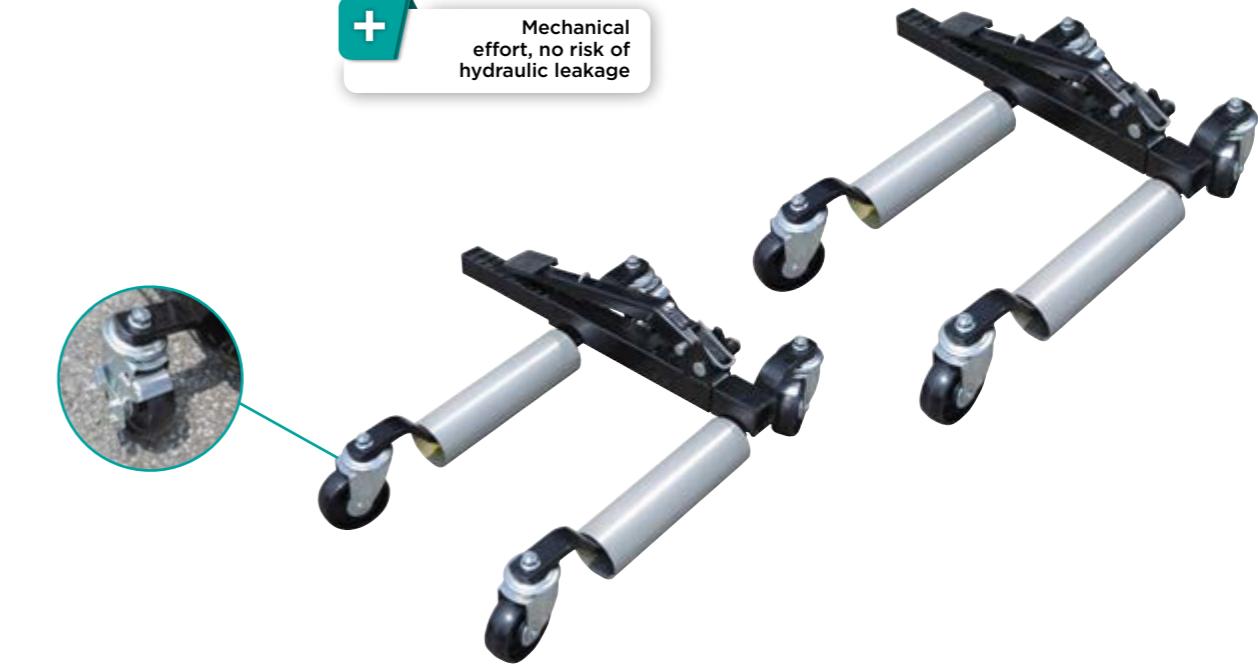

Specifications:

- lifting assisted by mechanical rack
- steel rollers L.280mm
- 4 wheels, 2 with brakes
- total capacity: 1180kg per pair
- working range: 340-710mm
- minimum and maximum wheel diameter: 450-810mm
- max capacity width: 11" (280mm)
- weight: 16kg

1180





BODYWORK LIFTING

HYDRO-PNEUMATIC MOBILE LIFTING COLUMN 1500kg

OH 9150

5 locking positions



+
Lifts the vehicle
in less than a minute



Flash to see the full description!

Specifications:

- 2 swivel wheels for easy handling
- safety pin: 5 safe working heights
- under-wheel or under-body lifting
- mobile and fast



1.5T



Supplied with:

- SA9151: under-wheel socket
Max. working height: 735mm
Minimum height: 100mm
Wheel diameter from 480 to 730mm
- SA9152: under-body pick-up
Max. working height: 835mm
Min. height: 140mm




TN

BODY REPAIR LIFT TABLE DUAL CYLINDER 400V 3T ON/IN-GROUND

PE 8101

Lifting table, free-standing or built-in, selected by micro-switch in the console. Underbody preparation table for bodybuilders, enables the vehicle to be lifted to the desired height for an ergonomic working position, protects against RSI. Ideal for minor dent removal, underbody work, sanding, painting, etc. Free-standing or built-in, electro-hydraulic operation. Pneumatic arm opening and closing. Reversible pad storage on console.

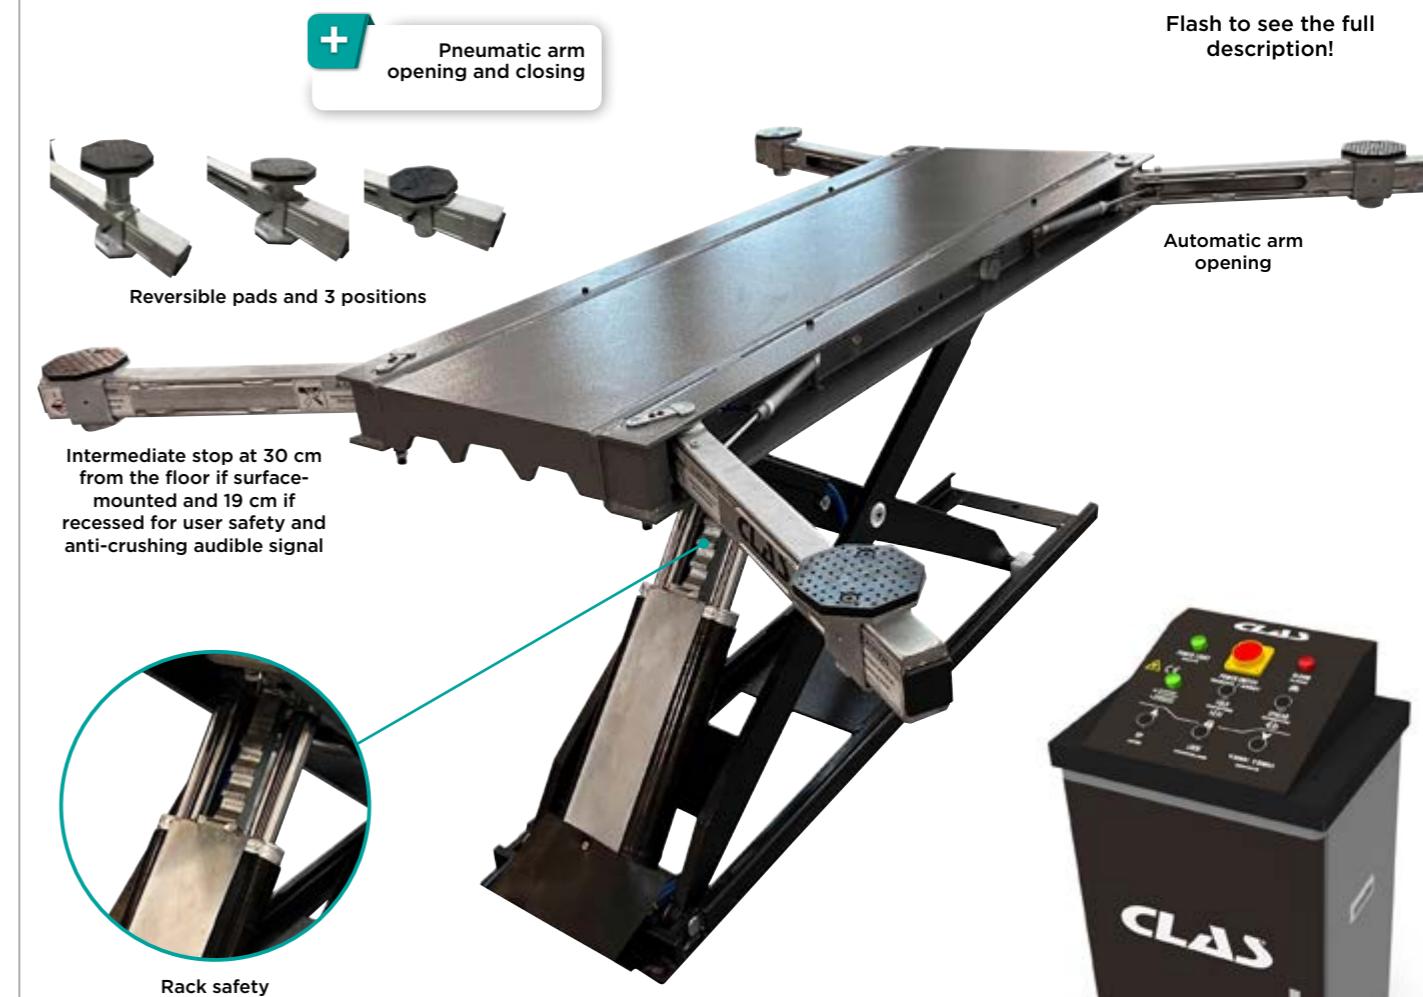

TP


SA 9950 2-COLUMN POST LIFT/SMALL SCISSOR/LIFTING TABLE INSTALLATION <=4T

SA 9960 LIFT LOAD TEST <4T

SA 9963 UNLOADING EQUIPMENT

Specifications:

- lifting height: 120-1230mm
- tray height: 120mm
- closed dimension: L. 1840xL. 640mm
- max. open dimension L 1837mm
- control panel
- drive power: 3kw
- drive voltage: (3 ~) 400V/50 V/Hz
- air supply 6-8bar
- double-cylinder version, with mechanical position-holding safety device (rack)
- 124° opening of 4 arms with reversible buffers
- Epoxy paint
- emergency lowering system in case of power failure
- intermediate stop at 30 cm from the floor if free-standing and 19 cm if built-in, for user safety and anti-crushing audible signal

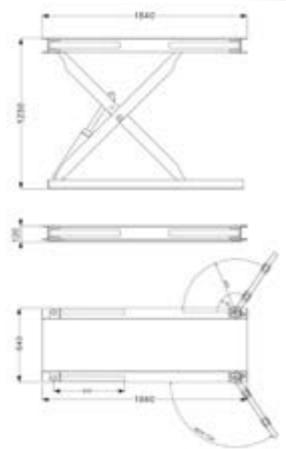

3T



TE

Flash to see the full description!





ROLLER CABINET

7-DRAWER BODY REPAIR ROLLER CABINET

EG 8888



Composition:
 OC081: 1 x hammer and punch set (7 pcs)
 OM0749BL: 1 x riveting pliers

SA0115: 1 x plastic stripping chisel

OC0033: 1 x trim clip pliers

OM8081: 1 x 190mm vise pliers

OM8080: 1 x 225 mm vise pliers

OP1510: 1 x 1/4"-3/8" mini ratchet

OP1203: 1 x mini straight grinder ø6 mm 25,000 rpm

OM0643: 1 x box of 5 carbide rotary files

EG0680: 1 x box of 5% cobalt HSS drill bits (25 pcs)

EG8009: 1 x dispenser/holder for paper towel roll for tool trolley

EG8001: 1 x metal workshop waste bin for tool trolley

OS4100: 1 x combination wrench insert 6-24mm (17 pcs)

OS2000: 1 x 3-10mm hexagonal socket set (7 pcs)

OC1700BL: 1 x windshield wiper blade puller

OC0302: 1 x scraper and cutter set

OC8078: 1 x 5-piece nylon spatula set

SA0881: 1 x hammering insert

OM0801: 1 x set of 6 pin punches on base

OM0803: 1 x automatic center punch

OM0160: 1 x composite handle riveting hammer 1000g

OM0170: 1 x mallet with interchangeable 32mm tip

OM0800: 1 x extra-flat chisel

OP1451: 1 x reversible ø13mm drill bit

OC6081: 1 x wide bodywork spoon

OC6080: 1 x long bodywork spoon

OP0099: 1 x straight pen blow gun

OS1200: 1 x diamond ph-slot screwdriver insert (8 pcs)

OS1210: 1 x T10-40 diamond torx screwdriver insert (7 pcs)

EG1007: 1 x 7-drawer tool trolley

OS3900: 1 x 1/2" 90-tooth ratchet insert (23 pcs)

OS3700: 1 x 1/4" ratchet insert, 90 teeth (55 pcs)

OS5300: 1 x pliers insert (4 pcs)



WELDING PLIERS

LOCK GRIP PLIERS SET (16 PCS)

OM 8069



TN

NO WARRANTY

Contents:

- OM8082 (x3): vice-grip 285mm
- OM8080 (x5): vice grip 225mm
- OM8083 (x3): vice grip 240mm
- OM8081 (x5): 190mm vise gripper

LOCK GRIP PLIER 190mm

OM 8081

Component of OM 8069



LOCK GRIP PLIER 285mm

OM 8082

Component of OM 8069



LOCK GRIP PLIER 240mm

OM 8083

Component of OM 8069



TN

NO WARRANTY

LOCK GRIP PLIERS 225mm

OM 8080

Component of OM 8069



BODYWORK PLIERS

OC 0025

Model with pivoting head for punching (Ø5mm) and bending (12mm) sheet metal before welding.
 For sheet metal up to 1.4mm.



TN

NO WARRANTY

OVERLOAD CIRCUIT BREAKER 12-24V

OE 1224

Max. load 12V:

- 32.5V/308A (8-20µs)

- 25.2V/59.5A (10-1000µs)

Max load 24V:

- 59.0V/169A (8-20µs)

- 45.7V/33A (10-1000µs)




TN

2 WARRANTY



FIND THE ALL BODYWORK CYLINDER RANGE HERE

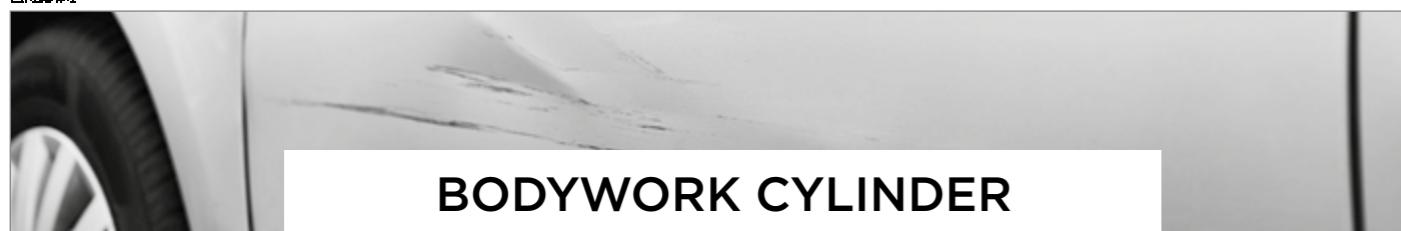

BODYWORK CYLINDER

4T COLLISION REPAIR SET

OC 0803

TN

Specifications:

- minimum pusher cylinder travel: 325mm
- max pusher cylinder travel: 425mm



Contents:

- SA0805: 4T cylinder
- SA0806: 4T 1/4" hand pump
- SA0804: spacer 500kg
- SA0802: 1/4" flexible hose
- Nozzle/support assortments (available by retail)
- SA1805: set of 4T bodywork jack extensions



4T



SA 0803	1/4 HYDRAULIC MALE ADAPTER	Component of OC 0803/OC 0804/OC 0801/OC 0802
SA 0804	SPREADER PLIERS	Component of OC 0803/OC 0804/OC 0801/OC 0802
SA 0805	4T HYDRAULIC RAM	Component of OC 0803/OC 0801
SA 0806	4T 1/4" HYDRAULIC HAND PUMP	Component of OC 0803/OC 0801
SA 0807	10T HYDRAULIC RAM	Component of OC 0804/OC 0802
SA 0808	10T 1/4" HAND PUMP	Component of OC 0804/OC 0802

10T COLLISION REPAIR SET

OC 0804

TN

Indispensable tool for automotive and industrial repair work on straightening, handling and lifting.

For SA 1815:

Supplied with a set of 5 sleeved extensions:

- usable length: 546mm (with 590mm Nozzle, Ø 30mm sleeve) (x1)
- usable length: 300mm (with 342mm Nozzle, Ø 30mm sleeve) (x2)
- usable length: 197mm (with Nozzle 234mm, Ø sleeve 30mm) (x1)
- usable length: 97mm (with Nozzle 140mm, Ø sleeve 30mm) (x1)

Contents:

- SA0807: 10T cylinder
- SA0808: 10T 1/4" hand pump
- SA0804: spacer 500kg max opening 105mm
- SA0802: 1/4" flexible hose
- Nozzle/support assortments (available by retail)
- SA1815: set of 10T bodywork jack extensions



10T



FIND THE ALL BODYWORK CYLINDER RANGE HERE



TN

BODYWORK CYLINDER SET PUSHER/PULLER 1/4"

OC 0705



SA 0703 MINI 4T RAM

SA 0704 2T RAM

SA 0705 MINI 10T RAM

SA 0706 4T RAM

SA 0707 10T RAM

SA 0708 5T PULLING JACK

10T



AIR HYDRAULIC PUMP 10T 1/4" & 3/8"

OH 0024

TN

Accessory for DM 0204/OH 3453/OM 9385/OM 9387/OC 0705/OC 0803/OC 0804

Pump to be coupled with a multitude of hydropneumatic tools such as bodywork jacks, straightening brackets, hydraulic extractors etc...



Versatility



10T



Specifications:


- 700 bar
- Aluminum housing
- oil capacity: 1.3l
- supplied with 2 types of MF 1/4" and 3/8" connections
- air inlet 1/4 MF connection, 25mm long
- air connection type ISO 6150 6mm M
- oil outlet M 3/8 F 1/4





FIND THE ALL PAINTLESS DENT REMOVAL RANGE HERE


FIND THE ALL PAINTLESS DENT REMOVAL RANGE HERE

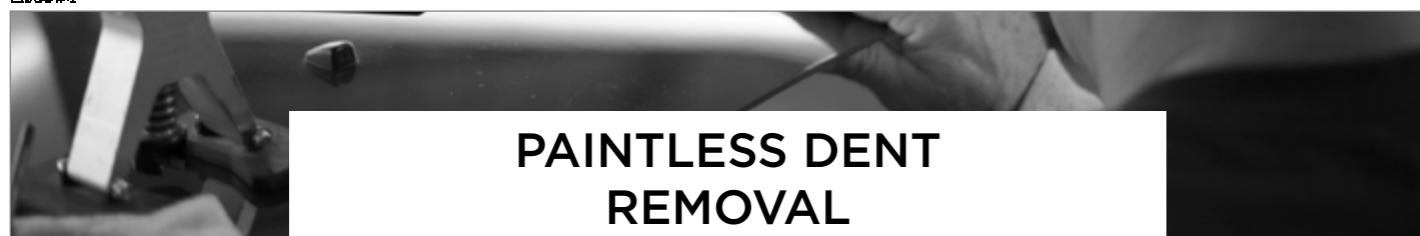

PAINTLESS DENT REMOVAL

PNEUMATIC STRAIGHTENING SQUARE

OC 0800

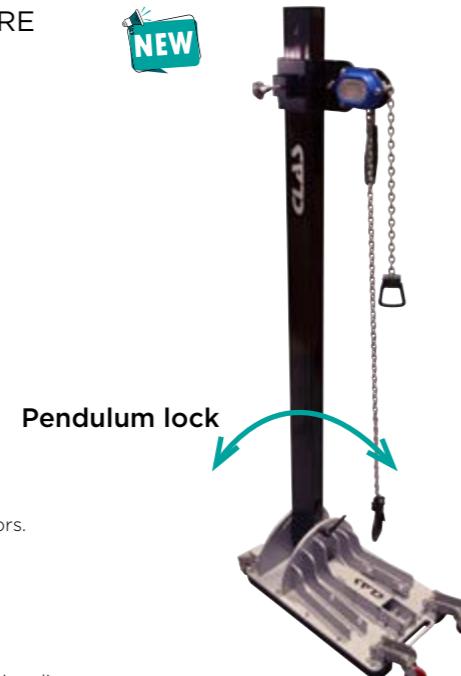

TN

Features:

- Integrated Venturi system for floor fixing.
- Wide, high-adhesion seal, effective even on uneven floors.
- Pulling capacity: 600 kg.
- Maximum height: 1.60 m.
- Winch equipped with high-strength chain.
- Reinforced structure for constant precision.
- Weight: 49 kg, with castors for easy movement.
- Supplied with strap and pull hook.
- Compatible with CLAS OC 0830 suction cup base (optional)

PNEUMATIC SUCTION PAD FOR SQUARE

OC 0830



TN

2
WARRANTY

Features:

- Integrated pneumatic venturi system for rapid vacuuming.
- Large, high-strength suction pad seal, effective on uneven floors.
- Reinforced traction ring for all types of bodywork operations.
- Robust steel construction.
- Perfectly flat base for optimum grip.
- Fully compatible with OC 0800 straightening column.
- Easy to use: quick connection to compressed air network.

POINT-PULL BOX WITH INERTIA WEIGHT

OC 0214



This dent removal kit enables the user to repair bodywork that has been dented or dented without even repainting the component.

The process consists of gluing plastic pellets to the body using the gun and glue specially designed for bodywork, and connecting the inertia weight or pulling pliers to bring back the painted sheet metal without damaging it. The pad is simply removed with a surface-cleaning solvent (not supplied) and the nylon chisel.



TN

Set of 72 pieces



100 W


10 BLACK GLUE STICK SET

OC 0403

Ø11mm
Rigid

10 AMBER GLUE STICK SET

OC 0405

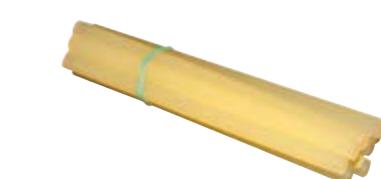Ø11mm
Flexible

10 WHITE GLUE STICK SET

OC 0406

Ø11mm
Intermediate

TN



SHORT SPREADER+ ACCESSORIES

OC 0259

2
WARRANTY

SET OF 40 PCS PULL-TAB

OC 0265



TN



GLUE GUN

OC 0264

Component of OC 0252/EG 8889




TN



KIT OF 13 DENT REMOVAL RODS AND ACCESSORIES

OC 8200

24-piece assortment of 13 paintless dent removal rods and accessories.
Ideal for straightening hail dents, minor door dings and other impact marks.
Supplied in carry bag.

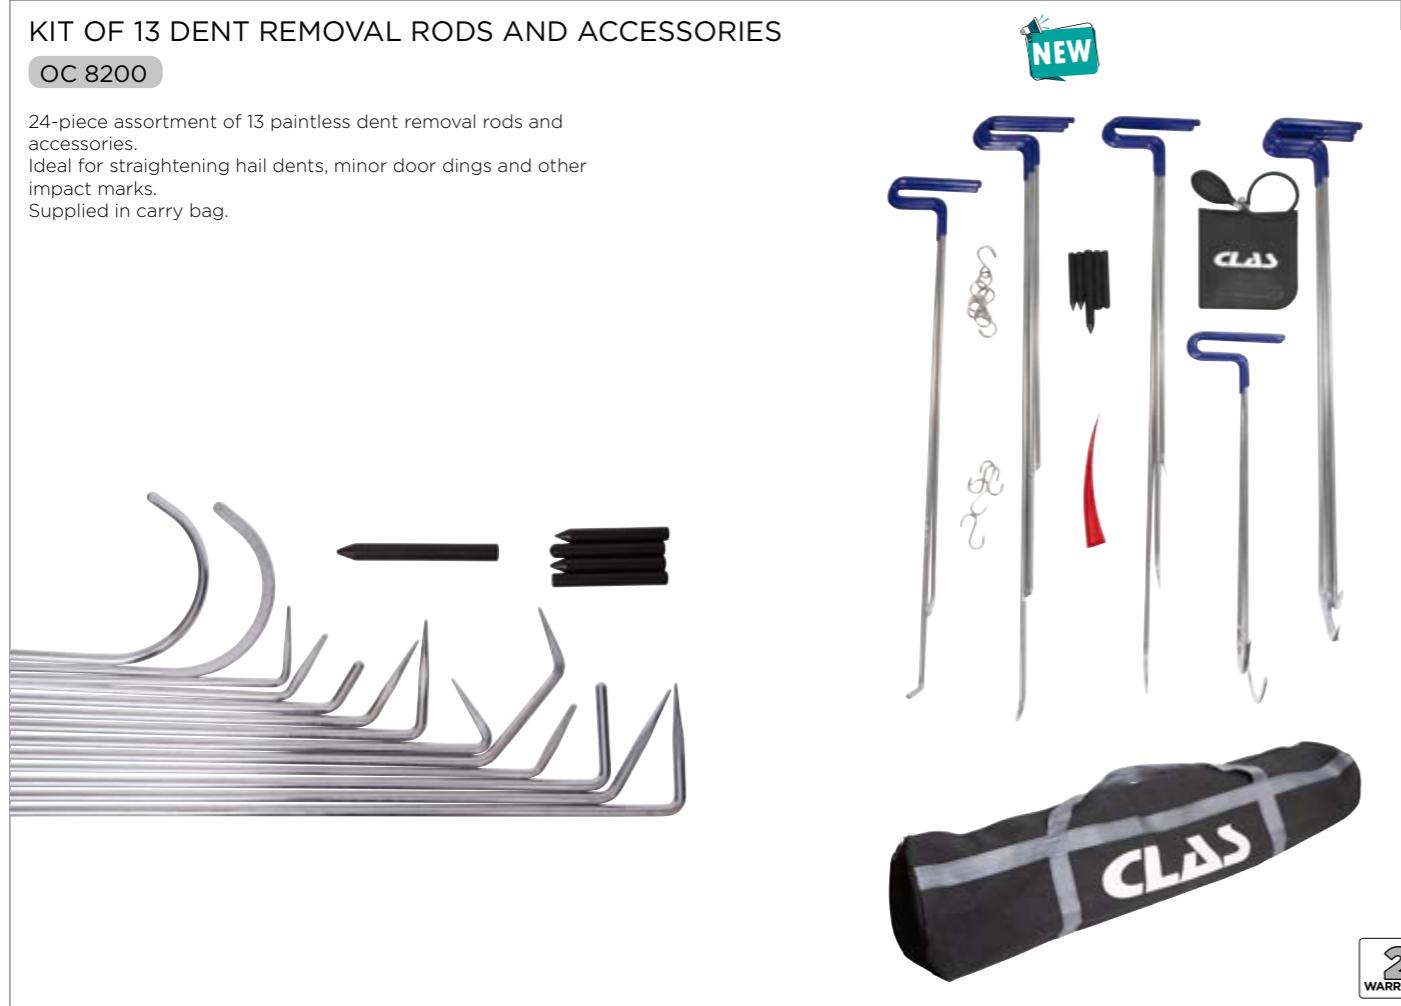

EXPERT DENT REMOVAL KIT 63 PIECES

OC 8300

Assortment of paintless dent repair rods.
Ideal for straightening hail dents, minor door dings and other impact marks.
Long and short rods in a variety of shapes make it easy to remove dents from the inside.



Compositions :

- double curved rods with interchangeable end caps
- rod sets with different finishes
- set of pvc or metal end caps, depending on impacts
- hooks to facilitate effort
- exercise lever with interchangeable ball finish



PAINTLESS DENT REMOVAL PACK

OC 8400

Complete paintless dent removal service (DSP)

Includes all the rods from the OC 8200 and OC 8300 kits, optimally arranged for quick access and efficient organization. Designed to provide an ergonomic, mobile and ready-to-use workstation for DSP operations on all types of vehicle.

Contents:


- OC 0720
- OC 8200
- OC 8300



BODYWORK SERVICE

OC 0720

Dimensions:
80x52cm.

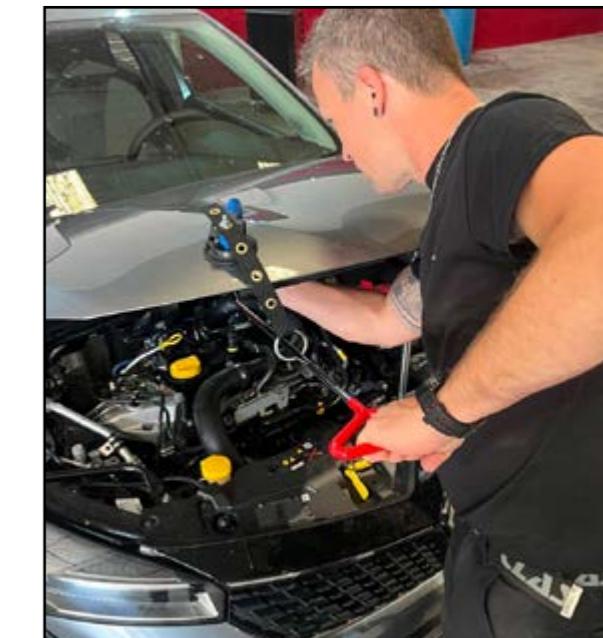



FIND THE ALL PAINTLESS DENT REMOVAL RANGE HERE

EXPERT BIT HOLDER PUNCH KIT

OC 0262 79 €HT

Punch-type aluminum dent removal tools, supplied with an assortment of interchangeable heads, for gentle removal of protrusions as well as light dents and impact marks on body panels.

Anodized aluminum body, designed to accept interchangeable punch tips in a variety of materials




EXPERT BODY HAMMER 2 BITS

OC 0261 79 €HT

Made from robust carbon fiber materials, this car dent repair hammer is designed to withstand heavy use without damage or deformation.

With a length of 47 cm, this car tooth repair hammer is easy to carry and store, ensuring you always have it to hand when you need it.

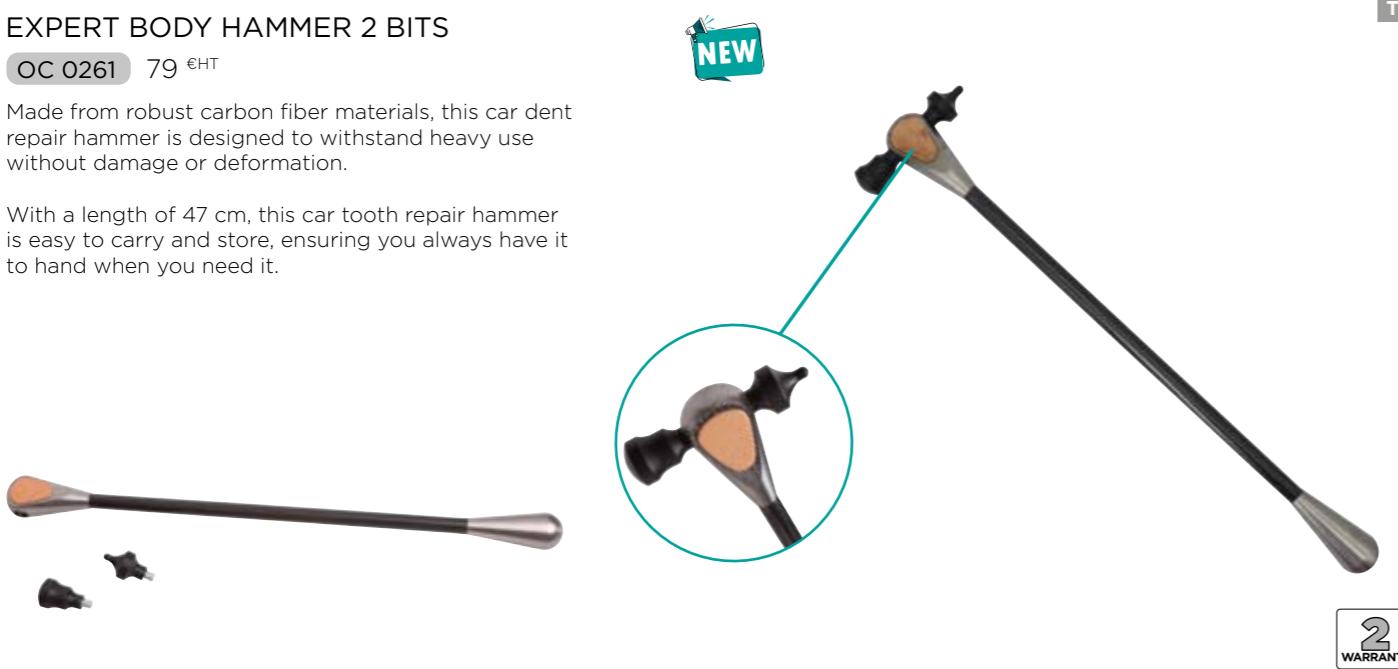

EXPERT KIT HAMMER AND BITS

OC 0260 149 €HT


Dent removal hammer and punch set

Punch-type aluminum dent removal punch, supplied with an assortment of interchangeable heads, for gentle removal of protruding points as well as light dents and impact marks on body panels.

Anodized aluminum body, designed to accept interchangeable striking tips in a range of materials compatible with the hammer.

Features :

- 47cm long hammer with Ø31mm ball grip, 27mm leather-covered flat head, 2 interchangeable cutter bits

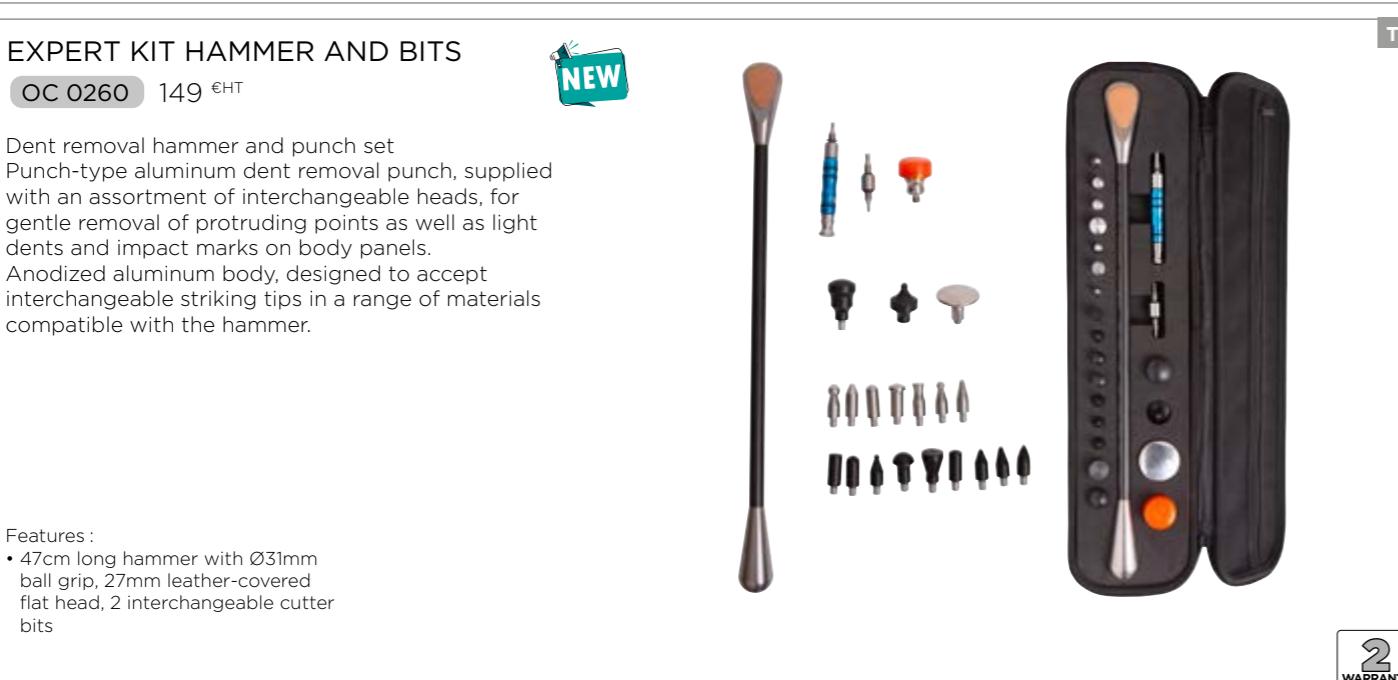

FIND THE ALL PAINTLESS DENT REMOVAL RANGE HERE



EXPERT DENT REMOVAL LAMP WITH BATTERY AND CHARGER

OE 1240 397 €HT

The lamp is easily attached to the bodywork using its pneumatic vacuum suction cup, or via its integrated magnet, for rapid installation on any type of surface. Mounted on a flexible 40 cm ball-and-socket joint, it can be freely oriented to precisely adjust the luminous flux to the area to be treated.

It features 1 to 3 LED strips that can be activated independently, enabling lighting to be modulated as required. Light intensity and color temperature are adjustable to optimize reading of even the finest impacts and deformations.

Supplied with an interchangeable ridged reflector, it perfectly highlights sheet irregularities for fast, precise and controlled dent removal.

Contents:

- OE1230: dent removal lamp
- PW 9112: battery charger
- PW 9004 : 20V 4Ah battery

Specifications:

- Reflector size: 22x52cm
- 3 independently controllable LED ribbons, adjustable in intensity and color



SA 1266 RIBBED POLYCARBONATE FOR OE 1230 DENT REMOVAL LAMP



LED DENT REMOVAL LAMP

OE 1231 79 €HT

This LED inspection light is easy to attach to any bodywork, thanks to its versatile system: a sturdy suction cup or an integrated magnet enable fast, secure installation, even on vertical surfaces.

Mounted on a flexible 55 cm ball-and-socket joint, it offers total freedom of movement. You can precisely adjust the light output to illuminate each work area effortlessly. Its high-performance LED provides neutral white light (≈ 455-457 nm) with a wide illumination angle (up to 140°), guaranteeing excellent visibility.

The lamp is supplied with a USB power cable, convenient for use with an external battery, mains charger or vehicle USB port.

Specifications:

- Dimensions: 19X36cm

PAINTLESS DENT REMOVAL 7 DRAWERS ROLLER CABINET 87 PIECES

EG 8889

Paintless dent removal by hot or cold gluing.

This technique is used when the paintwork is not damaged.

Several solutions are available:

- point-by-point pulling on the glued head using precision pliers or inertia weights
- sheet shrinkage by spreading glued fastening points with mechanical spreaders acting on pre-glued support points.

Contents:

- 1 x 7-drawer trolley EG0087
- 3 drawers with foam inserts ref: OC0252/OC0253/OC0254

 Optimized storage

 NEW

TN



GLUELESS DOT-PULL INSERTS (40 PCS)

OC 0252




TN



2 WARRANTY

BODY INSERT DENT REMOVAL PRINT 15 PCS

OC 0253

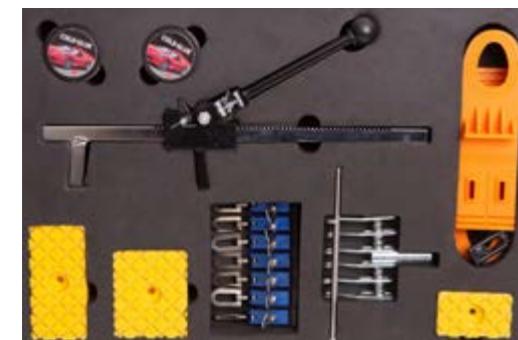

TN

BODY INSERTS DENT REMOVAL PULLING GLUING 32 PCS

OC 0254



TN

2 WARRANTY

2 WARRANTY

2 WARRANTY



LONG SPREADER

 NEW

The mechanical spreader allows the sheet to be removed using 2 pre-glued shims



TN


Features:
Spacer length 100cm, spacing capacity 90cm

2 WARRANTY

SHORT-DRAW KIT AND ACCESSORIES

OC 0256

The 40cm-long pull rod is used to pull glued strips for linear dent removal.

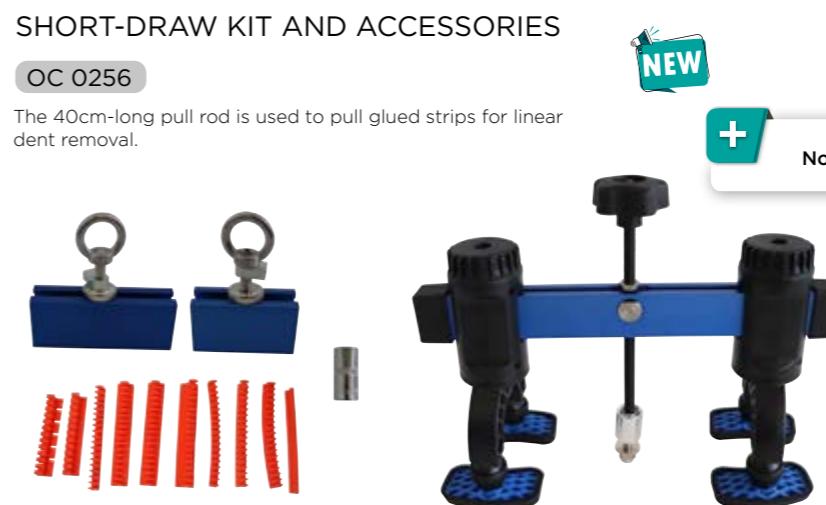

 NEW

 Optimized storage



TN

2 WARRANTY

LONG PULL KIT AND ACCESSORIES

OC 0255 249 €HT

The 90cm-long pulling rule is used to pull glued strips for linear dent removal.



 NEW

 Optimized storage

TN

2 WARRANTY

INERTIA HAMMER + ADAPTERS PULL BIT

OC 0257 49 €HT

This inertia hammer is designed for bodywork professionals wishing to perform precise, fast and efficient pulling operations on all types of sheet metal.



 NEW

 Optimized storage

TN

2 WARRANTY

Specifications:

- Hammer length: 520 mm
- Hook tip: 130 mm x 22 mm
- Steel construction
- Compatible with puller bits

MANUAL VACUUM DENT PULLER

OC 0210

Inertia mass for paintless dent removal



Manual pump requires no external pneumatic power supply

Contents:

- SA0227: suction cup Ø75mm
- SA0228: suction cup Ø100mm
- SA0229: suction cup Ø125mm
- SA0224: draw hook
- SA0410: manual pump for venturi

Weight: 1.22kg

TN

2
WARRANTY

DOUBLE SUCTION CUP

OC 0608

Tear strength 60kg
Ø160mm large suction cup
Ø90mm small suction cup2
WARRANTY

BODYWORK HAMMERS

HAMMER + BLOCK SET (7 PCS)

OC 0811



TN

OC 0812

OC 0813

OC 0814

OC 0815

OC 0816

OC 0817

OC 0818

Contents:

- 3 hammers with GENUINE HICKORY handles L.310mm
- OC0812: flat round-head planishing hammer with pointed tip
- OC0813: flat round-head planishing hammer with horizontal bit
- OC0814: swaging hammer, round head with squared and square head with squared head

4 Heaps

- OC0815: Comma 130x27mm
- OC0816: rail/universal 60x60x56mm
- OC0817: heel 78x60x27mm
- OC0818: anvil 80x62x55mm

WARRANTY

WIDE BODYWORK SPOON

OC 6081

Dent removal spoon ideal for bodywork.



Specifications:

- forged steel
- length: 260mm
- width: 50mm

TN

LONG BODYWORK SPOON

OC 6080

Dent removal spoon ideal for bodywork.



Specifications:

- forged steel
- length: 335mm
- width: 45mm

TN

2
WARRANTY

BODYWORK SLIDE HAMMER SET

OC 2211

Thanks to its numerous pulling accessories, in addition to the weight, it can be used to straighten small body parts.

Contents:

- 4.5kg mass
- weight stroke 50cm
- handle with protection
- SA4221: pigtail Nozzle
- SA4213: long curved hook 6cm
- SA4214: short curved hook 4cm
- SA4223: 90° U-shaped hook
- SA4216: 90° flat hook
- SA4218: Straight Striking Nozzle
- SA4219: Screw Pull Nozzle
- SA4220: chain tie-down Nozzle



TN

2
WARRANTY



REAR PARKING SENSOR PUNCH TOOL KIT


Ø17-Ø22mm

OM 0700

This kit allows you to drill front and rear bumpers directly to the required diameter for free-standing bumper sensors (reversing radars).



Ø8.5mm pre-drilling required



Does not damage
paint
No deburring

Specifications:

- hardened steel dies
- max drilling thickness: 4 to 6mm depending on punch diameter
- ratchet and wrench compatible
- 13mm hexagonal drive



PLASTIC REPAIR KIT

OC 6049

Ideal for minor plastic repairs on bumpers, headlight mountings, mirrors, interior trim, etc.

Contents:

- SA6042: 1 soldering iron with special soldering tip
- SA6081: 6 soldering rods (PP-Polypropylene)
- SA6082: 6 soldering rods (PS-Polystyrene)
- SA6083: 6 brazing rods (PE-Polyethylene)
- SA6084: 6 brazing rods (ABS)
- SA6080: 5 304 stainless steel grids
- soldering iron holder



TN



BI-COMPOSING GUN 50ml

OC 1025

For application of two-component adhesives in 50ml cartridges.
Supplied with 2:1 plunger



TN



BLACK STRUCTURAL GLUE 50ml

CO 1024

Accessoire of OC 1024/OC 1025

Specifications:

- structuring time: 1min
- drying time: 5min
- 2K polyurethane adhesive



TN



AEROSOL COOLANT FOR PLASTIC REPAIRS

SA 6039

Component of OC 6039

With its freezing power (45°C), the gas rapidly cools the various adhesives used in bodywork, and can also shrink metal parts (bearings).



TN



CORDLESS THERMAL STAPLER + 300 STAPLES KIT

OC 6070


Ideal for autonomous plastic repair.

Easy to use thanks to its 4-position articulated head, ideal for working around corners or in confined spaces.
Thermal protection (30-second work cycle).
Equipped with an LED light at the head to illuminate the working area.
Supplied with 300 stainless steel staples.

 **Rapid intervention**



Delivered in boxes of 50 staples

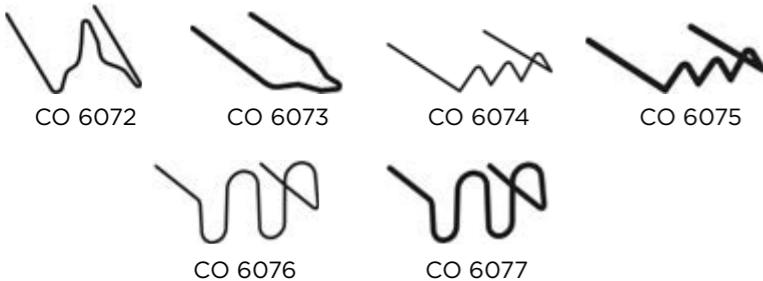

Protection against overheating



Max. temperature
600°C

 **3.7V 4000mAh**

4000mAh Li-ion battery

Specifications:

- length (excluding electrode): 220mm
- overall length: 255mm
- width: 35mm
- heating temperature: 600°C
- input current: DC 5V 2A
- output current: 3.7 8A Max
- battery: 3.7V 4000mAh Li-ion
- charging time: 3h
- capacity 400 staples with battery on one charge (hot stapler)



CO 6072	BOX OF 50 STAPLES M Ø 0.6 MM
CO 6073	BOX OF 50 STAPLES V Ø 0.8 MM
CO 6074	BOX OF 50 STAPLES S Ø 0.6 MM
CO 6075	BOX OF 50 STAPLES S Ø 0.8 MM
CO 6076	BOX OF 50 STAPLES U Ø 0.6 MM
CO 6077	BOX OF 50 STAPLES U Ø 0.8 MM



**4-position
adjustable
head**



**BODYWORK PAINTING
PREPARATION**

CENTRAL VACUUM CLEANER 2x1300W

EG 0055

Vacuum cleaner that can also be used as a central vacuum unit.
Compatible with pneumatic and electric tools up to 1200W.

 **Automatic filter
cleaning after each
use**



Specifications:

- 76L plastic bowl mounted on 4-wheel cart
- 2 1300W Engines
- tool tray 600x480mm
- 4.5m Ø28mm hose with integrated pneumatic hose
- vacuum 23.5kPa
- air flow: 119l/s
- noise level: 68dB
- dimensions: 580x590x940mm

Accessories included:

- SA0405: hose Ø28mm 4.5m
- SA0406: filter



Options:

- SA0409: 5 bags 77L
- SA5505: flexible Y-adapter for 2 operators
- SA5506: Y-pneumatic adapter for 2 operators



2.5mm RANDOM ORBITAL PALM SANDER
Ø150mm

OP 1312



5mm RANDOM ORBITAL PALM SANDER
Ø150mm

OP 1311



CONSUMABLES



PAINTING

CO 1002	PLASTIC PRIMARY SPRAY 400ml		
CO 1027	EXPRESS PAINT REMOVER SPRAY 500ml	Active formula: fast and efficient	
CO 1001	DARK GREY GARNISHING PRIMER 500ml		
CO 1042	LIGHT GREY FILLER PRIMER 500ml	Fast drying time Quick sanding	
CO 1044	BLACK FILLER PRIMER 500ml		



BODYWORK

CO 1003	BUMPER STRUCTURING SPRAY MEDIUM GRIT 400ml	Scratch-resistant	
CO 1029	BODY REPAIR DEGREASING/CLEANING SPRAY 500ml	Degreases and removes silicone Antistatic	
CO 1033	ANTI STONE-CHIP SPRAY 400ml	Exclusive thick formula, remains flexible after drying	
CO 1035	NO RUST SPRAY 400ml	Transparent	

NOTE

Find our applicator gun on page 130.



GLUE

CO 1023	MULTI-FUNCTIONAL GLUE SPRAY 400ml	Filament-free, remains flexible after drying	
CO 1024	BLACK STRUCTURAL GLUE 50ml	Ideal for plastic repairs	
CO 1034	ANTI GRAVEL MS POLYMER BLACK CARTRIDGE 310ml		
CO 1057	ANTI GRAVEL MS POLYMER BEIGE CARTRIDGE 310ml	Ideal for sprayed joints	
CO 1058	ANTI GRAVEL MS POLYMER GREY CARTRIDGE 310ml		



BODYWORK PAINTING GUN



SANDBLASTING GUN

OP 1481

For spraying soundproofing, sealing and rustproofing.



Specifications:

- Ø nozzle: 6mm
- operating pressure: 8bar max
- air consumption: 100 to 150L/min



TN



MAGNETIC PAINTWORK SUPPORT WITH PLIERS

OC 0028

Designed for painting small components such as mirror caps, trim strips, plastic covers...



TN



HVLP PROFESSIONAL SPRAY PAINT GUN

OP 1335

HVLP gravity-feed spray gun for bodywork and finishing.



Supplied with fitting and Ø2mm nozzle

Specifications:

- excellent distribution and atomization
- reworked ergonomics for improved grip
- stainless steel nozzle, Ø2mm treated Aluminum body
- 600ml polyamide cup
- filter
- single gasket
- very light
- operating pressure: 1 to 2bar



SA 1312 Ø1.2mm NOZZLE

SA 1314 Ø1.4mm NOZZLE

SA 1316 Ø1.6mm NOZZLE

SA 1320 Ø2mm NOZZLE

SA 1315 Ø1.3mm NOZZLE

49 €HT






FIND THE ALL BODYWORK PAINTING DRYING RANGE HERE



FIND THE ALL DOORS & CABIN RANGE HERE

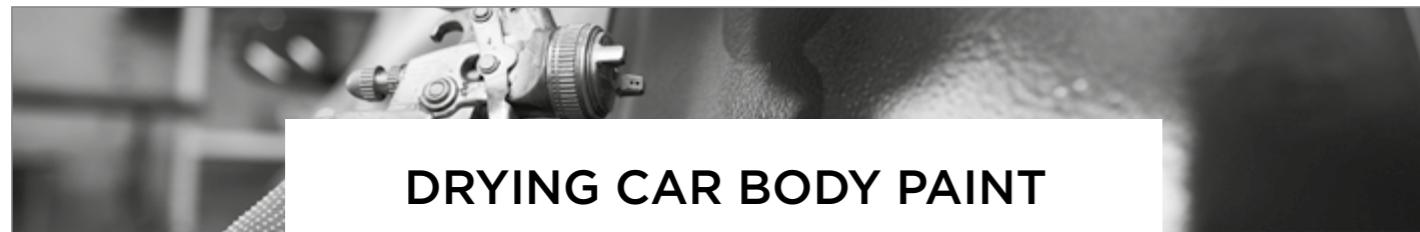

DRYING CAR BODY PAINT

STRAIGHT BLOWGUN PEN

OP 0099



Always at hand

- pocket blower
- adjustable flow rate
- Duralumin body
- length 110mm
- opening/closing by rotation

TN

DRYING GUN

OP 3501



Specifications:

- compressed-air venturi system
- air flow adjustment
- max. supply 6bar
- consumption 350l/min
- noise level in dB: 72dB at 3.5bar
- operating pressure 2 to 4bar
- dust filters

TN



DOORS & CABIN

TN

AIR WEDGE

OC 1103

Allows autoclave doors to be spaced apart and facilitates windshield removal.

Cushion dimensions:
155x165mm

Rigid PVC sheet
for easy insertion2
WARRANTY

TN

DOOR OPENING SET (9 PCS)

OC 9000BL

Kit of tools and rods to open a vehicle door whose keys have been left inside without breaking the window.

Delivered without instructions.

B.LINE
BUDGET SOLUTION

TN

2 DRYING GUNS + BASE

OP 3510

Specifications:

- ideal for drying high and low areas of the vehicle
- fully adjustable support, max. height 2.08m
- gun feed via spiral hoses
- quick-release couplings
- 2 guns can be spaced 0.85m apart



TN

4 DRYING GUNS + 2 BASES

OP 3520

Specifications:

- ideal for drying high and low areas of the vehicle
- fully adjustable support, max. height 2.08m
- gun feed via spiral hoses
- quick-release couplings
- 2 guns can be spaced 0.85m apart



TN

2
WARRANTY

TN



BODYWORK STAPLES

FIND THE ALL **BODYWORK STAPLES** RANGE HERE

BODYWORK STAPLES

GARNISHING TRIM SET (27PCS)

OC 8881

TN

The tools are made of composite material to avoid damaging the components.

The different models can be used in multiple positions.

Supplied in a heavy canvas storage case with space for each tool.

Lever set for removing door panels, window moldings, dashboards and trim, inside and out. They can also be used to remove glue residues.



NO WARRANTY

5 PCS NYLON TRIM REMOVAL SET

OC 8078

TN



NO WARRANTY

TOOL FOR REMOVING DOOR STAPLES

OC 8081

TN



TRIM CLIP PLIER

OC 0033

TN



Codes OEM :
3392

2 WARRANTY

