




GENERAL TOOLS


Solutions





KELVIN

It is the color temperature scale, which describes the way certain colors appear to us visually. We refer to warm or cool white depending on the number of Kelvin. Lamps between 5000 and 7000K are those that are close to daylight.

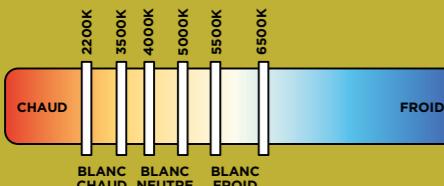

WHAT IS "LUMEN"?

It is the unit of luminous flow measurement, meaning the power of your lighting. One Watt is equivalent to +/- 80 Lumens (depending on the type of LED used).

PROTECTION RATINGS



IP : protection rating against liquids and dust.
1st number: from 0 to 6 indicates protection against solid bodies
2nd number: from 0 to 8 indicates protection against liquids
The higher the number, the more the product is liquid tight and/or dust-tight.



IK : protection rating against shocks and impacts. This number goes from 01 to 10.
The higher the index, the more resistant the product is. Going from 06 to 08 means a product 5x more resistant.

COMPARATIVE OVERVIEW

		LUMEN MAX	IK	6H	3H	VARIATOR	IP	HEAD LIGHT	ROTATION	FIXATION	THE ADVANTAGES
HEADLAMP	OE 0199BL	400lm	IK07	3h à 8h	4h	no	IP43	oui	-	elastic band	Wide light angle
INSPECTION LAMPS	OE 0299	500lm	IK07	1h30 à 8h	3h	no	IP55	oui (500lm)	-	magnet + clip-on pocket	Pocket size to always have it on hand
	OE 0099BL	450lm	IK05	5h à 15h	3h	no	IP33	no	180°	magnet + hook	Multipurpose
	OE 0399	360lm	IK07	3,5h à 8h	4h	yes	IP54	no	-	magnet + hook	Ultra thin
RAMPS	OE 0145BL	600lm	IK04	2h à 10h	4h	yes	IPX3	no	360°	magnet + hook	Economic
	OE 0143 OE 0143R	600lm	IK07	2h à 16h	4h	yes	IP54	yes (90lm)	360°	magnet + hook	Ultra thin
	OE 0901	3000lm	IK07	8h	3h	yes	IP44	no	360°	Dual magnet + hooks	Ultra powerful
	OE 0179	1200lm	IK07	2h à 6h	4,5h	no	IP52	no	360°	anti-scratch hooks	180° light diffusion
UV	OE 0699	-	IK07	5h	4h	no	IP66	no	180°	magnet + hook	UV lighting




HEADLAMPS

TN

DOUBLE HEADBAND HEADLAMP

OE 0199BL

The stretch + silicone headband adapts to all head sizes and provides comfort during use. Dual COB LED headband for improved light output and diffusion. Its contactless sensor makes it easy to switch on and off, even with dirty hands.



B.LINE
BUDGET SOLUTION


Light and powerful



Practical: with its motion sensor, it can be switched on and off with no hands!



Available in sets of 12 (delivered in display)

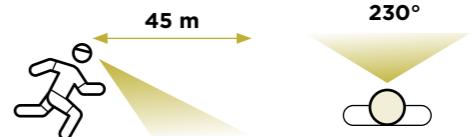



EXTRA-FLAT INSPECTION LAMP

OE 0399

Its extreme slimness (10mm) will enable you to work in the tightest spaces without difficulty.
Its sturdy design (IK07, Aluminum body) makes it both durable and ergonomic.



TN

ULTRATHIN CORDLESS RECHARGEABLE LAMP WITH VARIABLE INTENSITY

OE 0145BL

Economical

Hand lamp with dimmer switch.
Rechargeable via supplied USB cable.

ADVANTAGE
Good quality/price ratio



TN





RECHARGEABLE UV LIGHT

OE 0699

Essential for leak detection in combination with UV tracers.

It's powerful enough to detect any leak in your air-conditioning, oil, LR or fuel circuits.



NOTE —

Find air conditioning products
page 290

TN



TRAY COLLECTORS

FLUID COLLECTION CONTAINER

HU 0031



TN



Spout

Specifications:

- dimensions: 780x495x120mm
- max. wheelbase 920mm
- equipped with 4 directional wheels
- 2 handles for easy handling and transport
- pouring spout



TN

2

WARRANTY

HGV AXLE DRAIN PAN

HU 0035


This container is ideal for recovering fluids from lorry lifts and axles. When dismantling a wheel shaft on industrial vehicles, the oil contained in the gearboxes flows onto the rim. This container has been designed to recover this oil.



TN



NOTE —

Find out more about
our Storage spill
containment range
p. 67

- can be placed directly on the rim to collect oil
- adapts to different rim sizes
- with spout





FIND THE ALL FLUID DISTRIBUTION RANGE HERE



FLUID DISTRIBUTION


FLUID EXTRACTOR/DISPENSER

HU 0631

For Engine oil, coolant, brake fluid...
Do not use with flammable liquids

Specifications:

- probe length: 1600mmx3
- Ø6-8-10mm
- manual pump
- pressure/pressure switch



0.2L SYRINGE

HU 0637



FIND THE ALL FLUID DISTRIBUTION RANGE HERE



MANUAL PRIMING PUMP WITH TAPPET

HU 0657BL

B.LINE
BUDGETSOLUTION

Side lever pump ideal for transferring many types of (non-corrosive) liquids such as oil, diesel, antifreeze and windshield washer fluid from a standard 200l drum.



METAL TRANSFER PUMP

HU 0014BL

B.LINE
BUDGETSOLUTION

Side lever pump ideal for transferring many types of (non-corrosive) liquids such as oil, diesel and kerosene from a standard 200l drum.



2L GRADUATED PITCHER

HU 0002




5L GRADUATED PITCHER

HU 0005



TRANSFER PUMP FOR DRUMS 200L

HU 0011

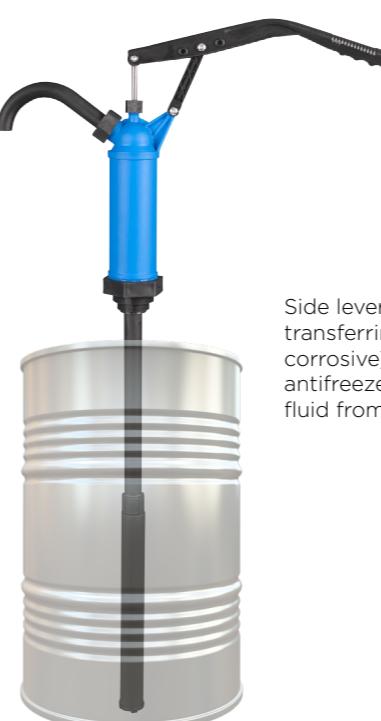

Side lever pump ideal for transferring many types of (non-corrosive) liquids such as oil, diesel, antifreeze and windshield washer fluid from a standard 200l drum.

ROTARY PUMP FOR UREA

HU 0013



Special adblue transfer pump, also suitable for other fluids such as coolant, diesel, oil...

**Specifications:**

- supplied with 2" bsp connection
- 0.3 liter per crank turn
- 1000mm intake tube
- Ø59mm threaded mounting 200



**Ratio 3:1**

3:1 MOBILE OIL DISTRIBUTION
TROLLEY FOR BARRELS 180-220kg
HU 0723



The gun ensures simple, fast and measured dispensing.
For oil and antifreeze.

Pump compatible with drums from 180 to 220kg thanks to its 845mm plunger fitted with a strainer.

Specifications:

Gun:
 • variable flow rate: 0-35l/min
 • compatible with 3:1 AND 5:1 pumps
 • maximum pressure: 100bar
 • accuracy: ±0.3%
 • 1/2" swivel connection
 • automatic non-drip flexible nozzle L.180mm
 • locking clip handle
 • 3V 1400mAh battery
 • autonomy: 8 years / 500,000L

Pump:
 • maximum flow rate: 12l/min
 • ratio: 3:1 for low to medium viscosity oil (SAE 15/130)
 • 4m hose included
 • supply pressure: 6-8bar
 • supplied with drum adapter

Cart:
 • width: 800mm
 • depth: 600mm
 • height: 860mm
 • dimensions of support tray: 652x652mm

**Ratio 5:1**

5:1 MOBILE OIL DISTRIBUTION
TROLLEY FOR BARRELS 180-220kg
HU 0724

**ADVICE**

Ratio: 3:1 for low to medium viscosity oil (SAE 15/130)

Ratio: 5:1 for medium to high viscosity oil (SAE 15/240)

TN



3:1 PNEUMATIC OIL PUMP

HU 0712

3:1

OIL PUMP REGULATOR

HU 0719

Accessory for HU 0712/HU 0713



5:1

**DRIP STAND FOR OIL GUN**

HU 0710

Accessory for HU 0617/HU 0711



TN

1/2" DIGITAL VOLUMETRIC OIL/ANTIFREEZE GUN

HU 0711

Specifications:
 • variable flow rate: 0-35l/min
 • compatible with 3:1 AND 5:1 pumps
 • maximum pressure: 100bar
 • accuracy: ±0.3%
 • 1/2" swivel connection
 • automatic non-drip flexible nozzle L.180mm
 • locking clip handle
 • 3V 1400mAh battery
 • autonomy: 8 years / 500,000L

**DRUM TROLLEY 180-220kg**

HU 0714

Specifications:

• width: 800mm
 • depth: 600mm
 • height: 860mm
 • support plate dimensions: 652x652mm



TN

FLEXIBLE SPOUT FUNNEL Ø145mm

HU 0513BL

Funnel with flexible spout and filter.



TN

B.LINE
BUDGET SOLUTION

Specifications:
 • funnel Ø145mm with filter (L.153mm)
 • flexible spout L.260mm





FIND ALL GREASING RANGE HERE



GREASING

GREASING GUN 500ml

HU 0512

This high-pressure grease gun operates at 550bar and features an improved piston for complete grease removal before and after each cartridge refill.



For 500ml cartridges, supplied with hose and rigid coupling

TN



PNEUMATIC GREASING GUN

450ml

OP 0521



Specifications:

- spout length: 170mm
- capacity: 450ml
- operating pressure: 6.2bar
- weight: 1.8kg



450 ml



1.8 kg

TN

HOSE GREASING REEL Ø8mm 20m 350bar

HU 1818

TN



Specifications:

- painted steel support
- shut-off device every 50cm
- SAE 100R2AT reinforced hose
- hose Øint. 8mm
- length 20m
- max. pressure 350bar
- 1/4" connection



2

WARRANTY



VACUUMS

DRY AND WET VACUUM CLEANER

2x1000W

EG 0040

Specifications:

- stainless steel bowl mounted on 4-wheel cart
- 2 1000W engines
- 80-litre tank Ø420mm
- 500mm drain hose on tank
- vacuum 21kPa
- air flow: 108l/s
- noise level: 73dB
- power supply 240V 4m
- power: 2000W
- dimensions (lengthxdepthxheight): 540x595x940mm

Included accessories:

SA 0442 FLAT BEC INNER SOCKET Ø42mm

SA 0443 BRUSH Ø60mm INTERNAL SOCKET Ø42mm

SA 0440 HOSE 2200mm Ø42mm

SA 0444 SCRAPER Ø37mm L400mm

SA 0445 BRUSH Ø37mm L400mm

SA 0441 FABRIC FILTER



DRY AND WET VACUUM CLEANER

2x1000W + SPIRAL 4m

EG 1040



DRY AND WET VACUUM CLEANER

2x1000W+FRONT BRUSH ASSEMBLY

600mm

EG 0045

Accessories included:

- SA0442: flat spout Ø42mm internal connector
- SA0443: brush Ø60mm inner socket Ø42mm
- handle Ø42mm accessory socket Ø37mm
- SA0440: hose 2200mm Ø42mm
- SA0444: scraper Ø37mm
- SA0445: brush Ø37mm length 400mm
- SA0441: fabric filter
- SA0045: front scraper 600mm with hose





FIND ALL SPRAYERS RANGE HERE



SPRAYERS

1.5L RED PRESSURE SPRAYER

OC 1501

- adjustable nozzle
- not suitable for corrosive products



PRO SPRAY GUN

OP 0044



Supplied with 4 color nozzles

TN



Specifications:

- 2 settings: jet and air flow
- nozzle L.300mm Ø2mm
- 1/4" connection
- operating pressure: 2 to 8bar



TN



1.7L PRESSURE SPRAYER BRAKE CLEANER

OC 1510

Widened base for greater stability when filling.

+
High resistance to aggressive products




Specifications:

- Viton® seals
- adjustable nozzle
- capacity: 1.5L+10
- graduation: 0.5L-16oz
- 5 and 10% dilution graduation
- side release valve
- enlarged base



5L CONTAINER OF BRAKES CLEANER

CO 1530

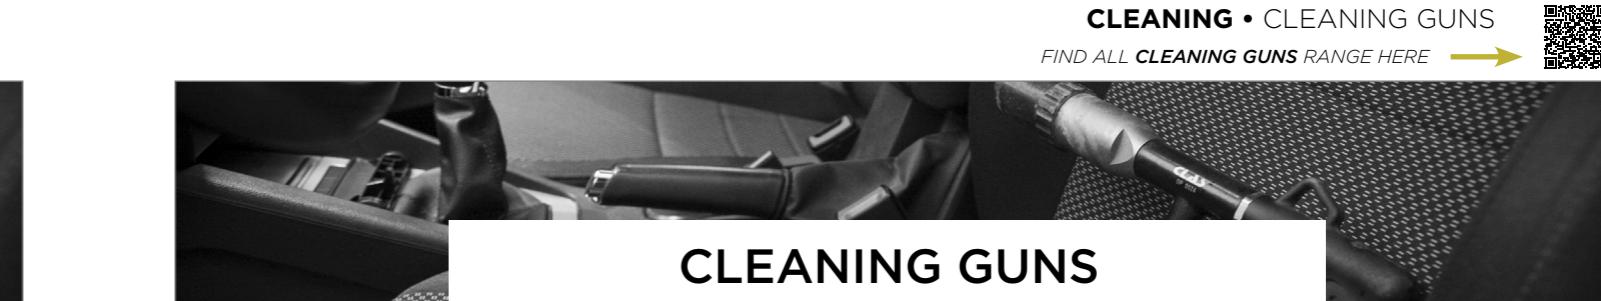

CLEANING GUNS

FIND ALL CLEANING GUNS RANGE HERE



ROTATING NOZZLE CLEANING GUN

OP 0025

+ Rotary flow

This blowgun with rotating nozzle has been specially designed for thorough cleaning.
Removes dirt and dust from carpets, seats and dashboard.
Can be used in the engine compartment.



TN



CLEANING GUN EVOLUTION

OP 0024

For use on seats, gearshifts, air vents, license plates, rims...
Handy and compact

Ball-bearing nozzle guide. No friction between nozzle and cone:

- reduced wear
- increased efficiency
- improved power
- very fine liquid vaporization for powerful cleaning
- use with water + cleaner solution or water alone

Specifications:

- nozzle rotation speed: 4000-8000 rpm
- operating pressure: 5 to 8 bar
- consumption: 180L/min
- bowl capacity: 1L
- supplied with fitting



SPARE PARTS

SA 1334	ALUMINUM TIP
SA 6072	TEFLON ROTATIVE NOZZLE
SA 6073	JOINT REPAIR KIT
SA 6074	BEARINGS+BLADES REPAIR KIT
SA 6075	ALUMINUM NOZZLE
SA 6076	BIT



HIGH PRESSURE RECHARGEABLE SPRAY 620ml

EG 1532

Ideal for lubricants, degreasing agents, brake cleaners, air dusting.
Long nozzle for hard-to-reach areas.

+
12 bar



TN



Specifications:

- trigger release
- Aluminum bottle
- 2-in-1 nozzle (mist and jet)
- Schrader®-type pressurization valve
- 12-bar safety valve



DEGREASING/CLEANING PRODUCT FOR WASHERS 25L

CO 1018



TN





ULTRASONIC CLEANERS



ULTRASONIC CLEANER 3L 100W 40KHz

OE 7200

TN

Specifications:

- heating temperature adjustable from 0 to 80°C
- timer from 1 to 99 minutes
- ultrasonic power: 100W
- heating power: 100W
- digital display
- tank drain valve
- tank capacity: 3L
- tank dimensions: 240x140x100mm
- outside dimensions: 270x240x170mm



ULTRASONIC CLEANER 9L 200W 40KHz

OE 7201



Specifications:

- heating temperature adjustable from 0 to 80°C
- timer 1 to 99 minutes
- power: 200W
- digital display
- tank drain valve
- bowl capacity: 9L
- bowl dimensions: 300x240x150mm
- external dimensions: 330x310x270mm



SA 7070 TUB OF ULTRASOUND CLEANING SOLUTION CONCENTRATE 25% 2L



EXPRESS PAINT REMOVER SPRAY 500ml

CO 1027

Removes paint, varnish and inks from all bodywork components and painting equipment. Removes burnt and encrusted gaskets (cylinder head, gearbox, water pump, etc.).

+ Active formula: fast and efficient

For effortless, impeccable results. Its active formula breaks down quickly. For use on solvent-resistant substrates.

Applications: Acrylic, Glycerol, Alkyd, Pliolite...

Also available in box of 12



TN

NO WARRANTY

BODY REPAIR DEGREASING/CLEANING SPRAY 500ml

CO 1029

Degreases and cleans bodywork components before painting or bonding. Removes residues of glue, grease, oil and silicone.

+ Degreases and removes silicone
Antistatic

Also available in box of 12



TN

NO WARRANTY

PURIFIANTS HABITACLE

CO 1074	CABIN PURIFIER 400ml LEMON
CO 1075	CABIN PURIFIER 400ml MUSK
CO 1076	CABIN PURIFIER 400ml MINT
CO 6216	CABIN PURIFIER 400ml LAVENDER
CO 6217	CABIN PURIFIER 400ml FOAMING
CO 6218	CABIN PURIFIER 400ml PINE
CO 6220	CABIN PURIFIER 400ml VANILLA

Also available in box of 12

NO WARRANTY

CAR WASH SET (7PCS)

EG 0011BL

This Contents is ideal for cleaning rims and the interior of the passenger compartment.



B LINE
BUDGET SOLUTION

TN

2 WARRANTY

WIRE BRUSH

EG 0056

Wire brush with carbon steel wire for a multitude of uses.




NO WARRANTY



AIR REEL Ø8mm 10m

OP 0083BL

Automatic cable distribution during winding

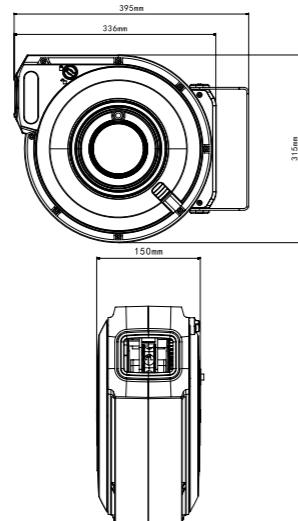B.LINE
BUDGET SOLUTION

Specifications:

- pipe: Øint. 8mm - Øext. 12mm, PU (polyurethane)
- resistant PP housing
- cable guide with automatic distribution/sweep
- shut-off device every 50cm (can be deactivated)
- 1/4" connector
- 180° swiveling wall bracket
- operating pressure: 10bar
- high-resistance spring tension




AIR REEL Ø10mm 15m

OP 1118


10 mm

AIR REEL Ø13mm 15m

OP 1119

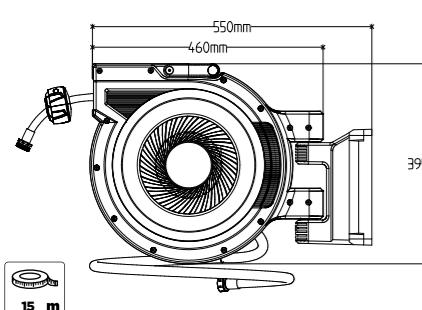13 mm

Supplied with fitting. Ready to use!



Specifications:

- hose: Ø int. 13mm, braided PU hose (polyurethane)
- braked winding
- cable guide with automatic distribution/sweeping
- stopping device every 50cm (can be deactivated)
- PP (polypropylene) housing
- 1/4" connection
- 180° swiveling wall bracket
- operating pressure: 10bar

**15M**


HIGH PRESSURE AIR/WATER REEL Ø10mm 20m 280bar

OP 1126

10 mm

Specifications:

- painted steel support
- automatic hose shut-off
- SAE 100R1AT reinforced hose
- hose Øint. 10mm
- max. pressure 280bar
- max. hot water 100°C
- 3/8" connection

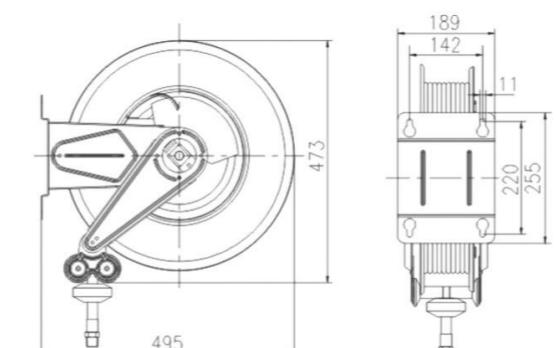**16M**

HGV AIR REEL Ø13mm 20m

OP 1628


13 mm

Equipped with directional rollers for easy unrolling from any technician position

**20M**

Specifications:

- painted steel support
- automatic hose shut-off
- hose Øint. 13mm
- max. pressure 20bar
- 1/2" connection

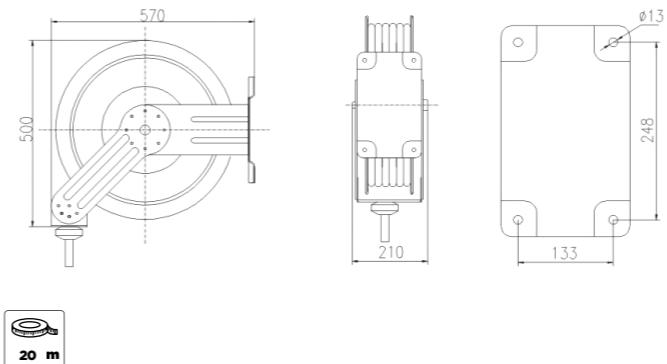




OIL & GREASE REELS

OIL REEL Ø10mm 15m 153bar

HU 1316

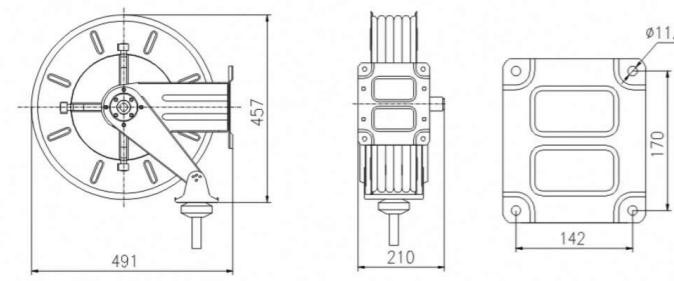

10 mm



15M


Specifications:

- painted steel support
- automatic hose shut-off
- SAE 100R2AT reinforced hose
- hose Øint. 10mm
- length 15m, 150°C
- max. pressure 153bar
- 3/8" connector



HOSE GREASING REEL Ø8mm 20m 350bar

HU 1818

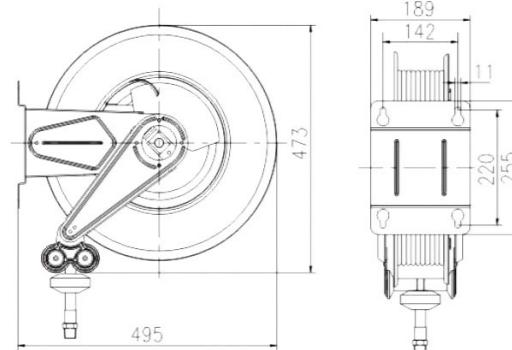

8 mm



20M

Specifications:

- painted steel support
- shut-off device every 50cm
- SAE 100R2AT reinforced hose
- hose Øint. 8mm
- length 20m
- max. pressure 350bar
- 1/4" connection





CABLE REELS

ELECTRICAL WIRE REEL 3x1.5mm² 10m

OE 0053BL

3x1.5

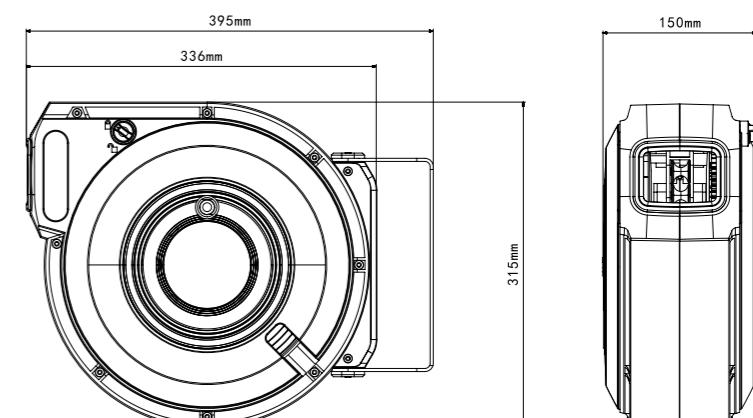B.LINE
BUDGET SOLUTION

10M



Specifications:

- 3x1.5mm² HO7RN-F-10m+1m cable
- capacity: 1000W-3000W
- cable guide with automatic distribution/scanning
- automatic 40cm locking (can be deactivated)
- adjustable stop
- 180° adjustable wall bracket
- overtemperature and overvoltage protection
- -5°/+56° operating temperature
- polypropylene housing
- UV protection





CABLE REELS 3x2,5mm² 20m


OE 0428

TN

3x2.5

Specifications:

- 3x2.5mm² HO7RN-F-20m+1m cable
- capacity: 1000W-3000W
- cable guide with automatic distribution/scanning
- free stop at desired length
- adjustable stop
- 180° rotatable wall bracket
- overtemperature and overvoltage protection
- 5°/+56° operating temperature
- polypropylene housing
- UV protection

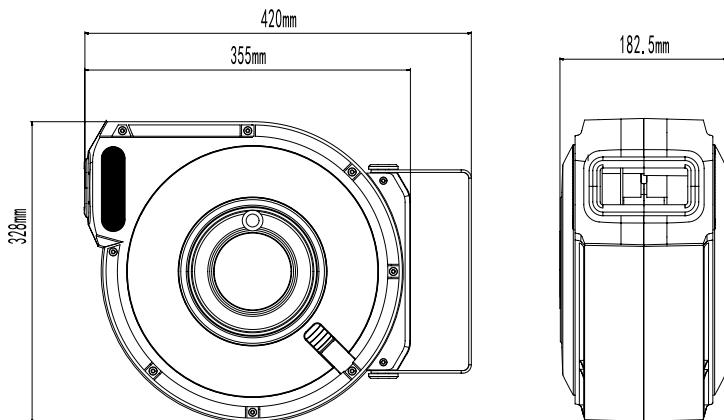

20M

SIGNPOSTING REEL 20m

EG 0017

TN



To mark out and delimit a pit or dangerous area.
Reduces the risk of accidents.

- equipped with a hook for easy delimitation
- UV-resistant fabric tape
- band width: 40mm
- 180° wall bracket
- stopping device every 50cm



20M



AIR CONNECTORS

ERP ENDS (x10)
PASSAGE Ø7.2mm



FAST CONNECTORS EUROPEAN PROFILE Ø7.2mm

NOTE

Ø7.2mm passage is recommended for painting applications.

SIZE	MALE THREAD	FEMALE THREAD	REF.		
1/4"		•	OP 0917		 x10
1/4"	•		OP 0918		 x10
Ø8mm			OP 0919		 x10
Ø10mm			OP 0920		 x10

SIZE	MALE THREAD	FEMALE THREAD	REF.	
1/4"		•	OP 0717	
3/8"		•	OP 0718	
1/2"		•	OP 0719	
1/4"	•		OP 0720	
3/8"	•		OP 0721	
1/2"	•		OP 0722	
Ø8mm			OP 0723	
Ø10mm			OP 0724	

IRP ENDS (x10)
PASSAGE Ø6mm



FAST CONNECTORS ISO PROFILE Ø6mm

SIZE	MALE THREAD	FEMALE THREAD	REF.		
1/4"		•	OP 0901		 x10
3/8"		•	OP 0902		 x10
1/4"	•		OP 0903		 x10
3/8"	•		OP 0904		 x10
Ø8mm			OP 0906		 x10
Ø10mm			OP 0907		 x10

SIZE	MALE THREAD	FEMALE THREAD	REF.	
1/4"		•	OP 0701	
3/8"		•	OP 0702	
1/2"		•	OP 0703	
1/4"	•		OP 0704	
3/8"	•		OP 0705	
1/2"	•		OP 0706	
Ø8mm			OP 0708	
Ø10mm			OP 0709	

IRP ENDS (x10)
PASSAGE Ø8mm



FAST CONNECTORS ISO PROFILE Ø8mm

SIZE	MALE THREAD	FEMALE THREAD	REF.		
1/4"		•	OP 0908		 x10
3/8"		•	OP 0909		 x10
1/2"		•	OP 0910		 x10
1/4"	•		OP 0911		 x10
3/8"	•		OP 0912		 x10
1/2"	•		OP 0913		x10
Ø8mm			OP 0914		x10
Ø10mm			OP 0915		x10
Ø13mm			OP 0916		x10

SIZE	MALE THREAD	FEMALE THREAD	REF.	
3/8"		•	OP 0710	
1/2"		•	OP 0711	
3/8"	•		OP 0712	
1/2"	•		OP 0713	
Ø8mm			OP 0715	
Ø13mm			OP 0716	





AIR BLOWGUNS

STRAIGHT BLOWGUN PEN

OP 0099



- pocket blower
- adjustable flow rate
- Duralumin body
- length 110mm
- opening/closing by rotation

TN

2
WARRANTY

VARIABLE BLOWGUN BLACK METALLIC NOZZLE

OP 0520



Specifications:

- brass insert: 1/4" F
- progressive
- pressure rating: 8bar
- temperature: -20°C+70°C
- Contents: Composite

TN

2
WARRANTYSET OF 10 IRP ENDS 6mm
PASSAGE MALE 1/4"

OP 0903



TN

2
WARRANTY

OILER

SA 6206



TN

TN

1/4 AIR SPIRAL HOSE
L.7.5m

OP 0375

NO
WARRANTY

7,5 m

1/4" ROTATING UNION

OP 0374



TN

NO
WARRANTY

AIR IMPACT WRENCHES

B.LINE
BUDGET SOLUTION

1/2"

1/2" D. IMPACT WRENCH
1600Nm

OP 1622BL

NEW

+ One-hand reverser

Removable air
intake grid for easy
cleaningSteel cage for long
service life Less
vibration at high
torque

Specifications:

- loosening torque: 1600Nm
- max. tightening torque: 880Nm
- speed: 8,500 rpm
- connection: 1/4"
- recommended hose diameter: 3/8" - 10mm
- supply pressure: 6.3bar
- consumption: 184l/min
- length: 159mm
- net weight: 1.8kg
- supplied with fitting

NOTE

See the full range of power
tools on p.111

1600Nm

2
WARRANTY



1/2" D. IMPACT WRENCH SET 1600Nm FOR WHEELS (19 PCS)

OP 1650BL



NEW

B.LINE
BUDGET SOLUTION

1/2"

One-hand
reverser

OP 1622BL



Specifications:

- loosening torque: 1600Nm
- max. tightening torque: 880Nm
- speed: 8,500 rpm
- connection: 1/4"
- recommended hose diameter: 3/8" - 10mm
- supply pressure: 6.3bar
- consumption: 184l/min
- length: 159mm
- net weight: 1.8kg
- supplied with fitting

Contents:

- OP1622BL: 1/2" impact wrench
- 3 special alloy wheel impact sockets: 17-19-21mm
- 10 1/2" hex impact sockets: 9-10-11-13-14-17-19-22-24-27mm
- 1/2" extension 125mm
- 4mm hex key
- oiler
- oiler
- supplied with fitting



1600Nm

1/2" D. COMPACT IMPACT WRENCH 1200Nm

OP 1623

NEW

1/2"

Only 131mm for
1.25Kg!Air circulation
around the rotor for
cooling

One-hand reverser

4 positions :
1 release
3 tightening

131 mm

6-blade rotor

1/2" high-strength
anvilLightweight and
highly resistant
double-injection
composite handleRemovable grid for
easy cleaning


Features :

- 4-position variator
- exhaust handle
- one-hand reverser

EN ISO 11148-6:2012

Specifications:

- loosening torque: 1200Nm
- max. tightening torque: 650Nm
- speed: 10,000 rpm
- connection: 1/4"
- Recommended hose Ø: 3/8" - 10mm
- supply pressure: 6.3bar
- consumption: 142l/min
- length: 131mm
- net weight: 1.25kg



1200Nm



1/2" D. IMPACT WRENCH 1750Nm DOUBLE HAMMER

OP 1604



Features :

- 4-position variator
- exhaust handle
- one-hand reverser

EN ISO 11148-6:2012

Specifications:

- double hammer technology
- loosening torque: 1750Nm
- max tightening torque: 1050Nm
- speed: 8,000 rpm
- connection: 1/4"
- recommended hose Ø: 3/8" - 10mm
- supply pressure: 6.3bar
- consumption: 184l/min
- length: 188mm
- net weight: 2.15.kg



3/4" D. IMPACT WRENCH 2000Nm DOUBLE HAMMER

OP 1634



Features :

- 4-position variator
- exhaust handle
- one-hand reverser

EN ISO 11148-6:2012

Specifications:

- double hammer technology
- loosening torque: 2000Nm
- max tightening torque: 1000Nm
- speed: 7,000 rpm
- connection: 3/8"
- recommended pipe diameter: 1/2" - 12.7mm
- supply pressure: 6.3bar
- consumption: 198l/min
- length: 201mm
- net weight: 2.4.kg



1" D. IMPACT WRENCH 3300Nm

OP 1680



Features :

- 3+3 position variator
- handle exhaust
- second-hand reverser

EN ISO 11148-6:2012

Specifications:

- double hammer technology
- release torque: 3300Nm
- speed: 4,000 rpm
- connection: 1/2"
- recommended hose diameter: 1/2" - 12.7mm
- supply pressure: 6.3bar
- consumption: 396l/min
- length: 480mm
- chuck length: 155mm
- net weight: 11.5kg



AIR RATCHET WRENCHES

3/8" D. RATCHET WRENCH

OP 1413




3/8"

- quiet
- integrated variable speed drive
- needle bearing
- reinforced head
- ergonomic handle
- reversible
- rotating intake connection
- rear exhaust

Specifications:

- maximum torque: 68Nm
- working torque: 14 to 68Nm
- speed: 150 rpm
- length: 256mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min



Supplied with fitting

2 WARRANTY

1/2" D. RATCHET WRENCH

OP 1209



1/2"

- silent
- lightweight
- integrated variable speed drive
- needle bearing
- reinforced head
- ergonomic handle
- reversible
- rotating intake connection
- rear exhaust

Specifications:

- maximum torque: 68Nm
- working torque: 14 to 68Nm
- speed: 150 rpm
- length: 256mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min



Supplied with fitting

2 WARRANTY

1/4"-3/8" D. MINI RATCHET WRENCH KIT

OP 1510




1/4"- 3/8"

Specifications:

- speed: 850 rpm
- max. torque: 40.7Nm
- fuel consumption: 113l/min
- length: 155mm
- 3 positions: clamping/unclamping/fixing

Contents:

- Supplied with fitting
- SA1510: 1/4"-3/8" reversible adapter
- Nozzle adapter



Supplied with fitting

2 WARRANTY



FIND ALL AIR DRILLS RANGE HERE



AIR DRILLS


Ø13mm REVERSIBLE DRILL

OP 1451

- double-speed trigger
- automatic chuck
- silent
- composite housing
- ergonomic grip handle + additional handle
- rotating intake connection
- bottom exhaust with silencer
- one-hand rotation reversal accessible from both sides

Specifications:

- Engine: 0.5hp
- speed: 800rpm
- length: 218mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min



DRILL SET HSS4241 (170 PCS)

EG 0671BL

B.LINE
BUDGET SOLUTION

DRILL SET HSS4241 (25 PCS)

EG 0670BL

B.LINE
BUDGET SOLUTION

DRILL SET HSS COBALT 5% (25PCS)

EG 0680

NO WARRANTY



NO WARRANTY

AIR RIVETER KIT

OP 1475



+ 900Kg pulling force




Supplied with fitting

SA 1475 5 PCS NOZZLES+RIVETER JAWS SET

2 WARRANTY

Specifications:

- for rivets up to 4.8mm depending on Nozzle
- pulling force: 900kg
- stroke: 14mm
- nozzles included: 2.4-3.2-4-4.8mm
- connection: 1/4"
- feed pressure: 6.2bar
- consumption: 1.4 to 1.8l/min



SPOT DRILL

OP 1460

- quiet
- low speed/high torque
- locking swivel clamp
- ergonomic handle
- rotating intake connection
- bottom exhaust
- carbide burr not included



+ High torque



SA 1460 CARBIDE REAMER 8.3x47mm

2 WARRANTY



AIR CUTTING TOOLS

CHISEL HAMMER SET

OP 1580

Chisel hammer for easy disassembly of rusted, seized or crimped components.



TN

Specifications:

- capacity: 3200bpm
- operating pressure: 6.5bar
- 1/4" connection
- consumption: 180l/min
- accessories: Ø10mm
- accessory plug length: 43mm

Contents:

- SA1586: chipping hammer
- SA1580: spring
- SA1581: flat chisel 20mm
- SA1582: curved chisel (welding points and rivets)
- SA1583: punch
- SA1584: cutting chisel
- SA1585: separator chisel



PNEUMATIC CHISEL TOOLS

OP 1480



TN

Chisel hammer set for easy disassembly of rusted, seized or crimped components.

Specifications:

- capacity: 2200bpm
- operating pressure: 5 to 8bar
- consumption: 114l/min
- noise level 100dB

Contents:


- SA1480: chipping hammer/knife
- SA1481: 1/2" adapter for impact sockets
- SA1482: holder for Ø38-63-74mm pile
- SA1483: Ø38mm round pile
- SA1484: round hollow pile Ø63mm
- SA1485: round stack Ø74mm
- SA1486: round heap Ø25mm
- SA1487: round hollow heap Ø25mm
- SA1488: 10 O-rings to hold heaps in place



10mm AIR BODY SAW

OP 1470

- lightweight
- composite body
- low vibration
- swivel coupling
- safety trigger
- ergonomic handle with protection



TN

Specifications:

- strokes/min: 9500
- stroke: 10mm
- length: 300mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 90l/min

Options:

SA1472: set of 5 blades with 24 teeth + 5 blades with 32 teeth



SA 1470 24-TOOTH BLADE

SA 1471 32-TOOTH BLADE

SA 1472 5 PIECE 24-TOOTH BLADE+5 PIECE 32-TOOTH BLADE SET



NOTE

Discover our body repair range on p.457



FIND ALL AIR GRINDERS RANGE HERE




AIR GRINDERS

MINI DIE GRINDER Ø6mm 25,000rpm

OP 1203

Specifications:

- speed: 25,000 rpm
- length: 159mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min
- lightweight
- grip handle
- safety trigger
- rear exhaust with silencer
- variable speed drive
- rotating intake connection



SA 1203 DRILLED SHAFT SUPPORT DISKS



Supplied with fitting

TN

25000trs/min



MINI DIE GRINDER Ø6mm 20,000rpm

OP 1204

Specifications:

- speed: 20,000 rpm
- length: 188mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min
- lightweight
- grip handle
- safety trigger
- rear exhaust with silencer
- variable speed drive
- rotating intake connection



Supplied with fitting

TN

20000trs/min




MINI ANGLE DIE GRINDER Ø6mm

OP 1205

Specifications:

- speed: 20,000 rpm
- angle: 115
- length: 194mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min
- lightweight
- grip handle
- safety trigger
- rear exhaust with silencer
- variable speed drive
- rotating intake connection



Supplied with fitting

TN

20000trs/min



RUBBER GRINDER

OP 1222

Ideal for damage-free removal of any stickers or traces of glue.



Specifications:

- speed: 25,000 rpm
- length: 159mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 113l/min
- supplied with fitting

Composition :

OP1203: 1 x mini straight grinder ø6mm 25000rpm
SA1421: 1 x rubber wheel ø86mm
SA1422: 1 x adapter



25000trs/min

TN

MULTI-SERVICE BRUSH

OP 1210

- lightweight
- protective housing
- grip handle + auxiliary handle
- use with eraser or brush
- safety trigger
- rear exhaust



Specifications:

- speed: 3,500 rpm
- length: 280mm
- connection: 1/4"
- supply pressure: 6.2bar
- consumption: 110l/min

Supplied with:

- fittings
- SA1210: wire brush L.23mm
- SA1213: adapter for rubber and brush Ø23mm



SA 1210 METAL BRUSH L23mm

SA 1209 WIRE BRUSH (FINE) L23mm

SA 1213 ADAPTER FOR GUM AND BRUSH

SA 1211 HARD GUM Ø105mm

SA 1212 SOFT GUM Ø105mm





GUN

AIR CAULKING GUN

OP 5061

For the application of silicone, glue and mastic in 310ml cartridges.

Specifications:

- Aluminum body
- total length 325mm
- 1/4" connection
- supply pressure: 5bar
- progressive trigger for speed control



Supplied with fitting



PNEUMATIC GUN FOR 370mm CARTRIDGES AND BAGS

OP 5060

For the application of silicone, glue and mastic in 310ml cartridges and 300, 400 and 600ml cartridges.

Specifications:

- Aluminum body and ring
- total length 470mm
- length: 370mm
- height: 270mm
- noise level: 80dB
- inlet pressure regulator from 4 to 8bar (10bar maximum) with 1/4" connection
- piston force: 160kgf at 8bar
- progressive trigger for speed control



Supplied with fitting and plastic spout



CARTRIDGE SPRAY GUN (POLYMER MS)

OP 1338

For the application of sprayable sealants, gaskets and waterproofing adhesives in 310ml cartridges. Application by spray or extrusion.



Specifications:

- adjustable pressure and flow
- operating pressure: 3-5bar



Supplied with spray and extrusion nozzles



PNEUMATIC GREASING GUN 450ml

OP 0521

NOTE

Grease gun p. 84



Specifications:

- spout length: 170mm
- capacity: 450ml
- operating pressure: 6.2bar
- weight: 1.8kg



SCREEN ADHESIVE CARTRIDGE 290ml

CO 1041

Specifications:

- MS polymer
- integrated primer
- application width: 10 to 14mm
- drying: 2 hours through core (at 20°C)
- hardness: SHORE 60



WHITE GLUE AND MASTIC CARTRIDGE 310ml

CO 1022

Adhesion without primer on metallic surfaces



ANTI GRAVEL MS POLYMER BLACK CARTRIDGE 310ml

CO 1034




ANTI GRAVEL MS POLYMER BEIGE CARTRIDGE 310ml

CO 1057



ANTI GRAVEL MS POLYMER GREY CARTRIDGE 310ml

CO 1058

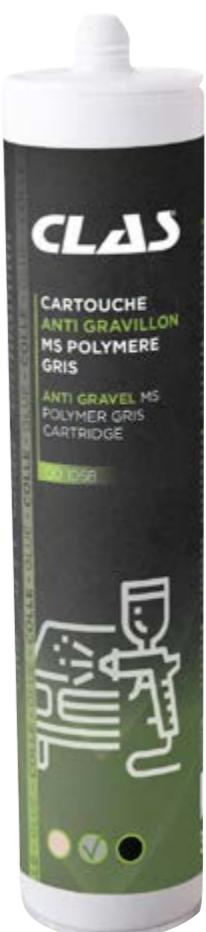

Easy to install, giving an optimal result. Ideal for application on bare metal.

This cutting-edge product can be applied wet-on-wet to obtain an optimal anti stone-chip effect in record time.

Adheres to all surfaces

Anti-corrosive, may even be applied to bare metal

High density: load up to 5mm in a single movement

Also permits the reproduction of seals which were originally sprayed and crimped seals



Ideal for sprayed joints



AIR SANDERS

2.5mm

2.5mm RANDOM ORBITAL PALM SANDER
 Ø150mm
 OP 1312

5mm

5mm RANDOM ORBITAL PALM SANDER
 Ø150mm
 OP 1311


TN



Supplied with fitting

Specifications:

- speed: 12000rpm
- orbit: 2.5mm
- platen: Ø150mm
- length: 196mm
- connection: 1/4"
- feed pressure: 6.2bar
- consumption: 57l/min
- net weight: 0.7kg
- ultra-light composite body with anti-vibration belt
- speed regulator
- rear exhaust
- connection for Ø32mm sleeve
- one-hand operation



2

WARRANTY


10mm BELT SANDER

OP 1445



Specifications:

- speed: 18,000 rpm
- ribbon: 10x330mm
- max. length: 330mm
- folded length: 207mm
- connection: 1/4"
- feed pressure: 6.2bar
- consumption: 116l/min



SA 1447 5 SANDING STRIP 80+5 SANDING STRIP 120 SET
 SA 1446 SANDING STRIP 120
 SA 1445 SANDING STRIP 80

TN

- safety trigger
- grip coating
- exhaust handle + silencer
- rotating intake connection
- safety tilt adjustment

Supplied with fitting

2

WARRANTY



PORTABLE POWER TOOLS



THE MUST AT YOUR FINGERTIPS

■ POWERFUL ■ ERGONOMIC ■ PERFORMANCE ■ RELIABLE

A compact, high performance, premium-quality range with a very affordable budget.
 Featuring the latest technologies, our products will bring you confidence in your day-to-day operations.
 Our products are guaranteed for **3 years**.



BRUSHLESS engine:

- no maintenance required
- reduced consumption
- more performance
- longer life



ELECTRONIC MANAGEMENT FOR GREATER SAFETY:

- Controlled release
- Safety clutch
- Progressive release trigger

BRUSH LESS MOTOR



KICKBACK CONTROL

Anti-bounce protection (depending on model)

STEEL STRUCTURE



AUTO STOP

Overload protection

Overheating protection

LED



BATTERY :

- 4Ah/20V battery compatible with our entire range
- High capacity
- Intelligent electronic management for longer service life
- Integrated load indicator
- Charge and discharge control

1/2" IMPACT WRENCH 680Nm 20V
BRUSHLESS + 2 BATTERIES 4Ah + CHARGER

PW 0680

Compact and
lightweight 1.78Kg

1/2"

TN



AUTO STOP MODE



Specifications:

- max. breakaway torque 680Nm
- max. tightening torque 400/320/240Nm
- max. power output (MWO): 880W
- 3 speeds
- stroke rate: 3700/3000/2300 (imp/min)
- idle speed: 2700/2200/1700 (rpm)
- drive: 1/2" diameter
- max. bolt Ø: M22
- voltage: 20V
- Led lighting
- vibration: ah=10.58m/s², K=1.5m/s².
- sound power: Lw=114.16dB(A), K=3dB(A)
- sound pressure: Lp=106.16dB(A), K=3dB(A)
- weight: 1.0Kg (without battery) / 1.78Kg (with battery)
- dimensions LxWxH: 130x76x210mm (with battery)

LED lighting

3 speeds

BRUSHLESS motor

1-hand reverser

Lithium-ion battery
high-performance 4AhBattery level
indicatorSupplied in transportable
case with 2 4.0Ah batteries
and 2.5A charger400 Autonomy bolts (M12)*
*[indicative value]

ADVANTAGE

Compatible with Makita batteries

Auto stop" mode on unscrewing: the tool stops
automatically when unscrewed, to avoid losing the element
when working in confined spaces.

680Nm

3
WARRANTY

1/2" IMPACT WRENCH 680Nm 20V BRUSHLESS WITHOUT BATTERY

PW 0681

Specifications:

- max. breakaway torque 680Nm
- max. tightening torque 400/320/240Nm
- max. power output (MWO): 880W
- 3 speeds
- stroke rate: 3700/3000/2300 (imp/min)
- idle speed: 2700/2200/1700 (rpm)
- drive: 1/2" diameter
- max. bolt Ø: M22
- voltage: 20V
- Led lighting
- vibration: ah=10.58m/s², K=1.5m/s².
- sound power: Lw=114.16dB(A), K=3dB(A)
- sound pressure: Lp=106.16dB(A), K=3dB(A)
- weight: 1.0Kg (without battery) / 1.78Kg (with battery)
- dimensions LxWxH: 130x76x210mm (with battery)



NEW

3
WARRANTY1/2" IMPACT WRENCH 1180Nm 20V
BRUSHLESS + 2 BATTERIES 4Ah + CHARGER

PW 1180

Powerful
torque

1/2"



AUTO STOP MODE



Aluminum body

LED lighting

3 speeds

BRUSHLESS
motor

1-hand inverter

Battery level
indicatorLithium-ion battery
high-performance 4AhSupplied in transportable
case with 2 4.0Ah
batteries and 2.5A charger320 Autonomy bolts
(M18)* *guide value

Specifications:

- max. breakaway torque 1180Nm
- max. tightening torque 900/720/540Nm
- max. power output (MWO): 1300W
- 3 speeds
- stroke rate: 2700/2200/1600 (imp/min)
- idle speed: 2500/2000/1500 (rpm)
- drive: 1/2" diameter
- max. bolt Ø: M24
- voltage: 20V
- Led lighting
- vibration: ah=12.21m/s², K=1.5m/s².
- sound power: Lw=110.15dB(A), K=3dB(A)
- sound pressure: Lp=102.15dB(A), K=3dB(A)
- weight: 1.90Kg (without battery) / 2.57Kg (with battery)
- dimensions (LxWxH): 170x76x228mm (with battery)

ADVANTAGE

Compatible with Makita batteries

Auto stop" mode on unscrewing: the tool stops
automatically when unscrewed, to avoid losing the element
when working in confined spaces.

1080Nm

3
WARRANTY

1/2" IMPACT WRENCH 1180Nm 20V BRUSHLESS WITHOUT BATTERY

PW 1181

Specifications:

- max. breakaway torque 1180Nm
- max. tightening torque 900/720/540Nm
- max. power output (MWO): 1300W
- 3 speeds
- stroke rate: 2700/2200/1600 (imp/min)
- idle speed: 2500/2000/1500 (rpm)
- drive: 1/2" diameter
- max. bolt Ø: M24
- voltage: 20V
- Led lighting
- vibration: ah=12.21m/s², K=1.5m/s².
- sound power: Lw=110.15dB(A), K=3dB(A)
- sound pressure: Lp=102.15dB(A), K=3dB(A)
- weight: 1.90Kg (without battery) / 2.57Kg (with battery)
- dimensions (LxWxH): 170x76x228mm (with battery)



NEW

3
WARRANTY





20V BRUSHLESS HAMMER DRILL + 2

BAT 4Ah + CHARGER

PW 2013

3 MODES



TN

13mm

ADVANTAGE

Compatible with Makita batteries



20V BRUSHLESS HAMMER DRILL WITHOUT BATTERY

PW 2014

Contents:

- sturdy case with handle
- drill percussion screwdriver
- belt clip



3 WARRANTY

ANGLE GRINDER 125mm 20V BRUSHLESS + 2 BATTERIES 4Ah + CHARGER

PW 3125



M14



35mm



8500 tr/min



TN

125mm

Specifications:

- max. power output (MWO): 800W
- 3 speeds
- disc diameter: 125mm
- idle speed: 6500/7500/8500 (rpm)
- spindle size: M14
- soft start
- blade stop: 3s
- cutting depth: 35mm
- voltage: 20V
- grinding vibration: ah=5.5m/s², K=1.5m/s²
- sanding vibration: ah=1.9m/s², K=1.5m/s²
- sound power: Lw=93.4dB(A), K=3dB(A)
- sound pressure: Lp=82.4dB(A), K=3dB(A)
- weight: 1.20Kg (without battery) / 1.85Kg (with battery)
- dimensions (LxWxH): 300x105x80mm (with battery)

ADVANTAGE

Compatible with Makita batteries



ANGLE GRINDER 125mm 20V BRUSHLESS WITHOUT BATTERY

PW 3126



TN

800W

3 WARRANTY

Contents:

- sturdy case with handle
- angle grinder
- side handle (removable)
- wrench for disc





PORTABLE POWER TOOLS

[FIND ALL PORTABLE POWER TOOLS RANGE HERE](#)

BOLT GUN + WHEEL SOCKET PACK

PW 8040



Delivered in a portable case with two 4.0Ah batteries and a 2.5A charger
320 bolts of autonomy (M18)* * [indicative value]



Composition :
OM0792: 1 x 1/2" torque wrench 40-220Nm
OM7027: 1 x 1/2" wheel socket set (10 pcs)
PW1180: 1 x 1/2" impact wrench 1180Nm 20V brushless + 2 4ah batteries + charger

ELECTROPORTABLE TOOL HOLDER & ACCESSORIES

PW 9150

Accessory for PW 0620/PW 0621/PW 1080/PW 1081/PW 2013/PW 2014/PW 3125/PW 3126/PW 9104/PW 9102/PW 9004/PW 8050/PW 8040/PW 8030/PW 8020/PW 8010/PW 2300/PW 1181/PW 1180/PW 0681/PW 0680

Ideal for storing and keeping your tools close at hand!

Holds 4 tools, plus charger and batteries on the shelf.
Supplied with fixing kit (screws/plugs).



20V 4Ah LI-ION BATTERY

PW 9014

Accessory for PW 9104/PW 9102/PW 8050/PW 8040/PW 8030/PW 8020/PW 8010/PW 3126/PW 3125/PW 2013/PW 1181/PW 1180/PW 1081/PW 1080/PW 0681/PW 0680/PW 0621/PW 0620



ELECTROPORTATIVE BATTERY CHARGER 2.5Ah

PW 9112



ELECTROPORTATIVE BATTERY QUICK CHARGER 4Ah

PW 9114





WORKBENCHES

1.5m WORKBENCH SET

EG 0311

High load-carrying capacity 700kg

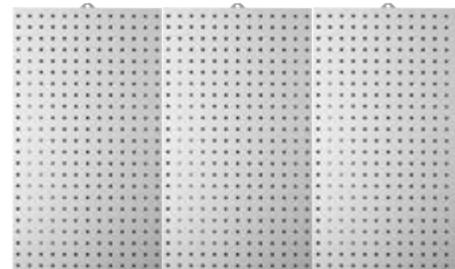

x 20

x 10

Dimensions:
• wooden top: L.1500xW.750xH.30mm
• frame: L.1410xW.692xH.855mm
• storage (metal tray): L.1410xL.610mm
• weight: 95kg





Composition:
EG0335: 1 x metal workbench 1.5 m with wooden top
EG0337: 1 x drawer
EG0344: 2 x bags of 10 double hooks ø6 mm L.50 mm
EG0346: 1 x bag of 10 single hooks ø6mm L.50mm
EG0347: 1 x bag of 10 single hooks ø6mm L.100mm
EG0357: 3 x perforated tool storage panel 500x900x30mm

2m WORKBENCH SET

EG 0312

High load-carrying capacity 700kg

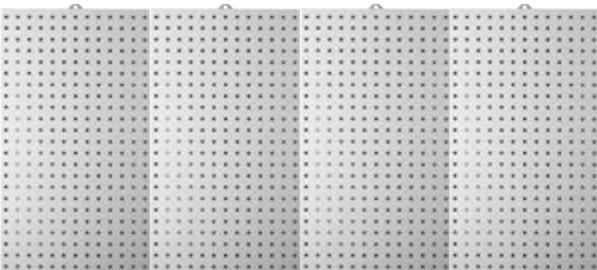

x 20

x 10

Dimensions:
• wooden top: L.2000xW.740xH.30mm
• frame: L.1900xL.692xH.855mm
• storage (metal tray): L.1900xL.610mm
• weight: 120kg



Composition:
EG0336: 1 x metal workbench with 2m wooden top
EG0357: 4 x perforated tool storage panels 500x900x30mm
EG0344: 2 x bags of 10 double hooks ø6mm L.50mm
EG0346: 2 x bags of 10 single hooks ø6mm L.50mm
EG0347: 1 x bag of 10 single hooks ø6mm L.100mm
EG0337: 2 x drawers



FIND ALL WORKBENCHES RANGE HERE



METAL STAND 1.5m WOODEN TRAY

EG 0360



TN

Specifications:

- Total: 1500x750x855mm
- Wooden worktop: 1500x750x30mm
- Frame: 1400x690x850mm

Maximum load-bearing capacity: 700kgs



METAL STAND 2m WOODEN TRAY

EG 0361

Max. Kg

100

TN

Dimensions:

- Total: 2000x750x855mm
- Wooden worktop: 2000x750x30mm
- Frame: 1900x690x850mm


Maximum load capacity: 800kgs

Max. Kg
700Kg
952
WARRANTYPERFORATED PANEL TOOL RACK
500x900x30mm

TN

EG 0357

Accessory for EG 0335/EG 0336/EG 0311/EG 0312

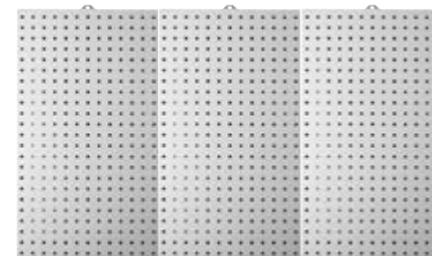

EG0357 panels are designed to be assembled together, and can be adapted as required.

Perforation, square 10x10,
spacing 38mmBAG OF 10 DOUBLE HOOKS
Ø6mm L.50mm

EG 0344

TN

BAG OF 10 SIMPLE HOOKS
Ø6mm L.50mm

EG 0346

BAG OF 10 SINGLE HOOKS
Ø6mm L.100mm

EG 0347

Hook diameter: 6mm
Hook length: 100mm
45° point
Fastener for 10x10mm square
perforated panels (38mm spacing)NO
WARRANTY2
WARRANTYBODYWORK 3 TRAY STORAGE
TROLLEY

OC 0711

TN

Allows storage of dismantled parts
such as headlamps, seat cushions,
dashboards, bumpers...

Specifications:

- 3 trays (2 wood and 1 mesh)
- tray heights: 260-810-1390mm
- mesh bottom
- 4 swivel wheels, 2 with brakes
- dimensions: L.630xL.110xH.1625mm

Max. Kg

100

TN

3 TRAY ROLLER CABINET

EG 0083

TN

Specifications:

- dimensions: 766x415x840mm
- tray dimensions: 760x410x60mm
- 2 fixed wheels Ø100mm
- 2 swivel wheels Ø100mm with brakes
- 2.5mm EVA foam tray protection
- load capacity per tray: 30kg
- total load capacity: 90kg



Max. Kg

90

TN

2
WARRANTY900W INDUSTRIAL BENCH GRINDER
Ø200x32x32mm WHEEL+BRUSH

EG 0225

TN

Specifications:

- adjustable protective screen with magnifiers
- double suction outlet
- speed: 2950 rpm
- Mounting:
- 250mm wide center distance
- depth center distance 155mm

240V

900
W

Supplied with:

- Ø200mm brush
- 60 grit grinding wheel



EG 0221 BENCH GRINDER BRUSH

EG 0273 VITRIFIED GRINDING WHEEL GREY CORUNDUM 200x32x32mm GRIT 60

2
WARRANTYPARALLEL JAW CLAMPS 150mm
QUICK TUBE HOSE APPROACH

OM 4066




Quick approach

TN

Specifications:

- jaw width: 150mm
- jaw height: 20mm
- jaw opening: 180mm
- interchangeable steel clamping jaws
- rotating base with 3 fixing points (155x190mm)
- weight: 24kg

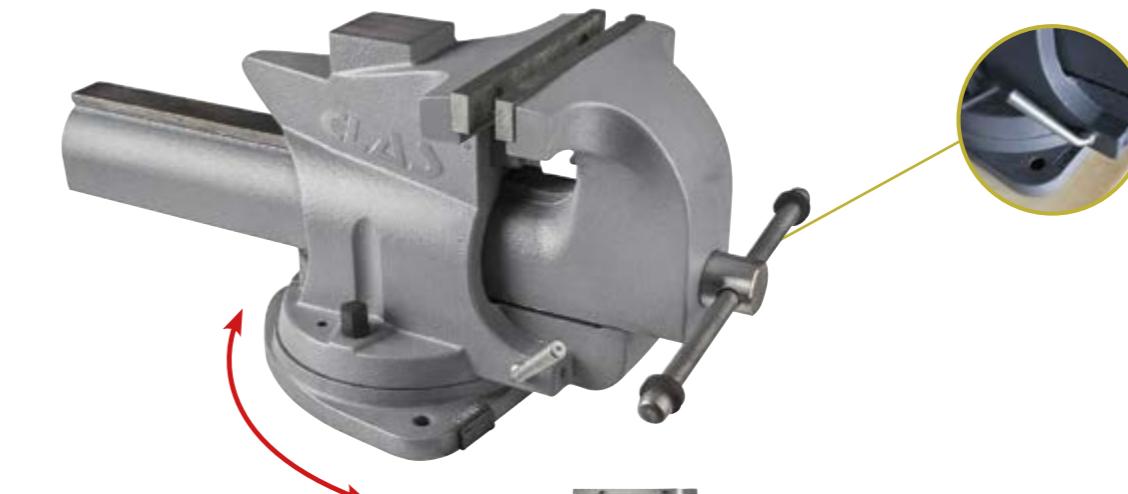Disengageable jaw system for immediate jaw
adjustment.

EG 7053 150mm 2 RUBBER COATING MAGNETIC JAW SET

EG 7054 200mm 2 RUBBER COATING MAGNETIC JAW SET



EG 7050 2 JAW 150mm SET

EG 7051 2 JAW 200mm SET

TN

PARALLEL JAW CLAMPS 205mm QUICK
TUBE HOSE APPROACH

OM 4068

Specifications:

- jaw width: 205mm
- jaw height: 22mm
- interchangeable steel clamping jaws
- tube, anvil and horn jaws
- jaw opening: 260mm
- useful height inside vice: 95mm
- swivel base with 3 fixing points (180x208mm)
- power take-off for tube max diameter 75mm
- weight: 35kg

5
WARRANTY



FIND ALL WORKBENCHES RANGE HERE

MODULAR WORKSHOP KITCHEN 2.6m

MA 1000

This workshop furniture set is the ideal solution for optimizing space and organization in your garage. Designed for professionals, it combines ample storage space with a sturdy work surface.

**Contents:**

- 1 tall cabinet
- 1 mobile trolley with 6 drawers
- 2 base units
- 3 wall units
- 1 MDF worktop
- 6 perforated wall panels
- 4 fixing bars (for wall units and perforated panels)



Height-adjustable legs

Hydraulic assistance

FIND ALL WORKBENCHES RANGE HERE



TN

**1 sideboard with 6 drawers:**

670x880x460mm

Height without wheels: 750mm

4 small drawers + 2 large drawers

Maximum weight per drawer = 35kg

Maximum weight on worktop = 350kg

4 wheels, 2 of which have brakes

**1 cabinet:**

600x1950x500mm

Weight supported per shelf: 50kg

4 height-adjustable shelves

4 adjustable feet

**1 fixed base cabinet with 4 drawers:**

680x900x500mm

3 large drawers + 1 small drawer

4 adjustable feet

**1 fixed double-door base cabinet:**

hinged door: 680x900x500mm

1 shelf

4 adjustable feet



MINI TORCH WITH RETRACTABLE TUBING + GAS REFILL

EG 0541



Contents:

- EG0540: mini shrink flashlight

1 mini gas flashlight
Shrink tubing set, color assortment:
1x15mmx500mm
60x1.5mm
35x2.5mm
25x3mm
20x5mm
10x6mm
10x10mm

- EG0047: gas refill

EG 0540 MINI TORCH WITH RETRACTABLE TUBING

SA 0541 RANGE OF RETRACTABLE SLEEVES

SA 0540 MINI TORCH

TN

NO WARRANTY

WIRE BRUSH

EG 0056



Wire brush with carbon steel wire for a multitude of uses.

- carbon steel wire
- grip handle


TN

NO WARRANTY

WHITE MARKER FOR ALL SURFACES

EG 0021

Water-based paint marker

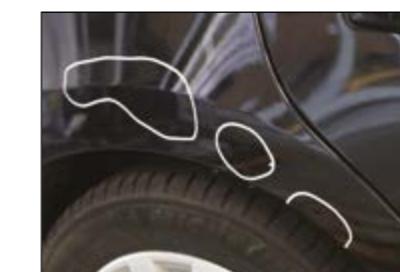

NO WARRANTY

Specifications:

- UV-resistant
- for all surfaces: metal, plastic, wood, glass, stone, canvas...
- transparent body for immediate control of remaining paint level
- VOCs less than 0.6% (Volatile Organic Compounds)
- meets ASTM D436 standard (non-toxic)



MAGNETIC FLEXIBLE PICK UP TOOL Ø5mm L.525mm

OM 8088



2 WARRANTY



MAGNETIC FLEXIBLE PICK UP TOOL Ø5mm L.1070mm

OM 8086



2 WARRANTY

LONG FLEXIBLE MAGNETIC SHAFT

OM 8087

This tool is ideal for picking up small objects from hard-to-reach places. The four curved claws ensure a firm grip, and the powerful magnet makes it easy to pick up metal objects.

+
2 in 1 product

Specifications:

- total length: 700mm
- Ø15mm magnet
- flexible sheath and Aluminum support



2 WARRANTY

TELESCOPIC MAGNET 170mm-670mm

OM 8071



TELESCOPIC MIRROR 228mm-715mm

OM 8074



2 WARRANTY



RIVETING PLIERS

OM 0749BL



B.LINE
BUDGET SOLUTION

TN

Specifications:

- sheathed handle with return spring
- supplied with 4 nozzles Ø2.4-3.2-4.0-4.8mm
- wrench for nozzle assembly
- length: 270mm

PRO PLIERS FOR RIVETS & LOCKNUTS

OM 0480



Powerful

NOTE

Pneumatic solution
see p. 96

TN

Suitable for:

- rivets Ø2.4-3.2-4-4.8-6.4mm
- crimping nuts Ø4-5-6-8-10mm



Contents:

- pull-screws M4-M5-M6-M8-M10
- nozzles 3.2-4.0-4.8 and 6.4mm



SA 1489 REPAIR KIT FOR RIVETING PLIERS

Component of OM 0480

2
WARRANTY

THREADED RIVET SET (150 PCS)

CO 0480

Contents:

- 25 M3x9mm crimping nuts
- 25 crimp nuts M4x11mm
- 25 crimping nuts M5x13mm
- 25 crimping nuts M6x15mm
- 25 Crimp Nuts M8x18mm
- 25 Crimp Nuts M10x21mm

SA 2481 THREADED RIVET M3x9mm (25 PCS)

SA 2482 THREADED RIVET M4x11mm (25 PCS)

SA 2483 THREADED RIVET M5x13mm (25 PCS)

SA 2484 THREADED RIVET M6x15mm (25 PCS)

SA 2485 THREADED RIVET M8x18mm (25 PCS)

SA 2486 THREADED RIVET M10x21mm (25 PCS)



TN

NO
WARRANTY



HOOK SET FOR JOINTS (4 PCS)

OM 9216

Special hooks for joints L.130mm



TN

2
WARRANTY

LEVER SET WITH STRIKE DISK (4 PCS)

OM 0258

Contents:

- SA0242: lever with striking pad L.200mm
- SA0243: lever with impact pad L.300mm
- SA0244: lever with impact pad L.450mm
- SA0246: lever with impact pad L.600mm



NO
WARRANTY

NUT SPLITTER

OM 0623

This toolbox is ideal for removing seized or damaged nuts. The principle is simple: the chosen tool cuts the nut to open it and extract it from the thread.

Practical and easy to use, this kit is indispensable in the workshop.



TN

2
WARRANTY

Contents:

- SA0624: nut splitters for 9 to 12mm nuts
- SA0625: nut splitters for nuts from 12 to 16mm
- SA0626: nut splitters for nuts from 16 to 24mm
- SA0627: nut splitters for nuts from 22 to 27mm



419 PIECE O-RING JOINT SET

EG 0525

Compatible with: fuel, oil, acid.

Contents:	14pcs. 16x2.5mm 20pcs. 3x1.5mm 20pcs. 4.4x2mm 18pcs. 5x2mm 23pcs. 7x1.5mm 23pcs. 10x1.5mm 23pcs. 13x1.5mm 14pcs. 10x2.5mm 13pcs. 11x2.5mm 14pcs. 13x2.5mm 13pcs. 14x2.5mm	10pcs. 28x3.5mm 14pcs. 18x2.5mm 13pcs. 19x2.5mm 14pcs. 21x2.5mm 13pcs. 22x2.5mm 10pcs. 18x3.5mm 10pcs. 20x3.5mm 10pcs. 22x3.5mm 10pcs. 23.5x3.5mm 10pcs. 25x3.5mm 10pcs. 26.5x3.5mm	10pcs. 30x3.5mm 10pcs. 31x3.5mm 10pcs. 33x3.5mm 10pcs. 34.5x3.5mm 10pcs. 36x3.5mm 10pcs. 38x3.5mm 10pcs. 41x3.5mm 10pcs. 44x3.5mm 10pcs. 47x3.5mm 10pcs. 50x3.5mm
------------------	---	---	--



TN

NO WARRANTY

E TYPE EXTERNAL CIRCLIP SET 1.5-22mm (300 PCS)

CO 0525

Contents:	• 10mm x50 • 12mm x40 • 15mm x20 • 19mm x20 • 22mm x20
	• 1.5mm x30 • 3mm x30 • 5mm x40 • 6mm x50



TN

3-32mm EXTERNAL CIRCLIP SET (300 PCS)

CO 0527

Contents:	• 3mm x20 • 4mm x10 • 5mm x15 • 6mm x25 • 8mm x15 • 9mm x20 • 11mm x15 • 12mm x15 • 13mm x25
	• 14mm x15 • 16mm x20 • 19mm x25 • 20mm x15 • 22mm x20 • 25mm x15 • 26mm x15 • 28mm x10 • 32mm x5



3-32mm INTERNAL CIRCLIP SET (300 PCS)

CO 0526

Contents:	• 3mm x20 • 4mm x10 • 5mm x15 • 6mm x25 • 8mm x15 • 9mm x20 • 11mm x15 • 12mm x15 • 13mm x25
	• 14mm x15 • 16mm x20 • 19mm x25 • 20mm x15 • 22mm x20 • 25mm x15 • 26mm x15 • 28mm x10 • 32mm x5



TN

NO WARRANTY

LUBRICANT SILICONE UNIVERSAL SPRAY 500ml

CO 1030



Anti corrosion
Anti-oxidation

LUBRICANT TEFLON SPRAY 500ml

CO 1031



Free from greasy residues and silicone: dust doesn't stick.

Also available in box of 12

SUPER RELEASING GRAPHITE SPRAY 400ml

CO 1026



Long-lasting protection

Also available in box of 12

BLACK STRUCTURAL GLUE 50ml

CO 1024



Ideal for plastic repairs

Also available in box of 48

MASTIC REPAIR BAR TO MODEL METAL 57g

CO 1046



Can be drilled, tapped, threaded, filed, painted...

FLEXIBLE INSTANT GLUE 20g

CO 1032



Powerful, instant bonding

Also available in box of 48

NO WARRANTY



INDUCTION HEATERS

INDUCTION HEATER

OE 0800

Heats a part at a precise point, making it easy to release screws, nuts, bolts, connecting rods, hubs (even rusty ones), lambda probes, ball bearings... It also makes it easy to remove stickers, glued door strips or truck wheel nuts.

+ Increased safety
Time saving



Command control

Coil lock

Specifications:

- frequency: 25-60kHz
- automatic overtemperature shutdown
- short-circuit and open-circuit protection, overload alarm
- dimensions: 200x140x75mm



Contents:

- remote central induction unit with 3m power cord and 70cm connection cable (for accessibility)
- SA0819: rigid induction coil Ø19mm L.220mm
- SA0832: rigid induction coil Ø32mm L.220mm
- SA0818: flexible induction coil L.800mm
- SA0817: induction pad Ø50mm L.220mm
- shoulder strap
- plastic case with foam



SA 0816	RIGID INDUCTION COIL Ø23mm	Component of OE 0800/OE 0610
SA 0819	RIGID INDUCTION COIL Ø19mm	Component of OE 0800/OE 0610
SA 0817	ROUND INDUCTION PAD Ø50mm	Component of OE 0800/OE 0610
SA 0832	RIGID INDUCTION COIL Ø32mm	Component of OE 0800/OE 0610
SA 0838	RIGID INDUCTION COIL Ø38mm	Component of OE 0800/OE 0610
SA 0818	FLEXIBLE INDUCTION COIL	Component of OE 0800/OE 0610



HGV INDUCTION HEATER

OE 0900

This tool heats a part at a precise point, making it easy to release screws, nuts, bolts, connecting rods, hubs (even rusty ones), lambda probes, ball bearings... It also makes it easy to remove stickers, glued door strips or truck wheel nuts.



It's a real alternative to blowtorches or flame torches: its induction system enables precise, flameless heating of a (conductive) metal part, with no risk of damaging neighbouring non-conductive parts (glass, plastic, paint, etc.).

What's more, the operator saves considerable time when setting up the tool.

Contents:

- remote central induction unit with 3m power cord and 2m connection cable (for accessibility)
- side-heating induction coil

Specifications:

- frequency: 18-60kHz
- power: 3.7kVA
- power regulator: 10-100
- control display and timer
- LED lighting of work area
- liquid-cooled
- dimensions: 240x200x440mm
- weight: 11.5kg



SA 0901 3L COOLING LIQUID



ELECTRONIC MEASURING INSTRUMENTS

POLARITY/CONTINUITY TESTER 3 TO 48V

OE 0065BL

Automotive, truck and motorcycle voltage and battery tester. Positive/negative cable testing.


B.LINE
BUDGET SOLUTION


UNIVERSAL NON INTRUSIVE TEST PROBE SET CAT. II

AC 5115

Compatible with all standard 4mm sockets.



TN

NO WARRANTY

Contents:

- pair of test leads with straight and 90° connectors max 1000V, L.120cm
- pair of cable piercers for intrusive measurements max 30V
- pair of fine probes for inverted tests max 24V



CLAMP METER 1000A

OE 5020



TN

2 WARRANTY

Specifications:

- current test
- ammeter test
- diode test
- continuity test
- data storage
- IEC-61010 CATII with overload protection
- 3-digit 16mm LCD digital display
- automatic scales
- supplied with battery and cord
- clamp opening: 55mm
- dc voltage: 600V±(0.5%+5)
- AC voltage: 600V±(1%+5)
- direct current: 200/1000A±(2.5%+5)
- alternating current: 200/1000A±(2.5%+5)
- resistance: 200ohms ±(1.2%+5)
- frequency: 2kHz±(2%+5)
- power supply: 9Vx1





CAT.I DIGITAL MULTIMETER

OE 3008BL



B.LINE
BUDGETSOLUTION

Specifications:

- DC voltage: 200mV-2000mV-20V-200V-500V
- AC voltage: 200V-500V
- DC current: 200uA-20mA-200mA
- resistance: 200ohm-2000ohm-20Kohm-200Kohm-2000Kohm
- battery: 6LR61 PP3
- dimensions: 126x70x24mm



DIGITAL MULTIMETER CAT. III

OE 3004



Specifications:

- DC voltage: 200mV-2V-20V-200V-300V
- AC voltage: 200mV-2V-20V-200V-300V
- DC current: 20mA-200mA-10A
- AC current: 20mA-200mA-10A
- resistance: 200ohm-2kohm-20kohm-200kohm-2Mohm-20Mohm
- diode test: approx. 2.8V
- temperature: 0-1000°C
- battery test: 1.5-9V-12V
- continuity: <30ohm
- overhead lighting



BLACK TOUCH POINT IP2X
FOR VAT DEVICE

OE 3011

Accessory for OE 3010/OE 3004

IP2X measuring tip with 4 mm female banana connector, black. Hard tip for scraping varnish, paint and oxidation. Safety 1000 V CAT IV



Standard: IEC 61010-031



RED TOUCH POINT IP2X FOR
VAT DEVICE

OE 3012

Accessory for OE 3010

IP2X measuring tip with red 4 mm female banana connector. Hard tip for scraping varnish, paint and oxidation. Safety 1000 V CAT IV



Standard: IEC 61010-031



TAPS & DIES

DRILL SET
HSS4241 (25 PCS)

B.LINE
BUDGETSOLUTION

EG 0670BL



DRILL SET HSS COBALT 5%
(25PCS)

EG 0680

HSS drills with 5% cobalt have a longer service life and are ideal for drilling hard metals such as stainless steel.



Contents:
• drill bits from 1.0 to 13.0mm, every 0.5mm



DRILL SET HSS4241 (170 PCS)

EG 0671BL

Contents:

- 10 x 1mm drill bits
- 10 drills 1.5mm
- 10 drills 2mm
- 10 drills 2.5mm
- 10 drills 3mm
- 10 drills 3.5mm
- 10 drills 4mm
- 10 drills 4.5mm
- 10 drills 5mm
- 10 drills 5.5mm
- 10 drills 6mm
- 10 drills 6.5mm
- 10 drills 7mm
- 10 drills 7.5mm
- 10 drills 8mm
- 5 drills 8.5mm
- 5 drills 9mm
- 5 drills 9.5mm
- 5 drills 10mm



B.LINE
BUDGETSOLUTION



NOTE

Find our drills
page 114

4-32mm HSS STEP DRILL

EG 0432



Spacing: 2mm



DRILL-TAPS-DIES SET (37 PCS)

OM 9221

Contents:

- 8 Dies: 3x0.5-3.5x0.6-4x0.7-5x0.8-6x1.0-8x1.25-10x1.50-12x1.75
- 8 Roughing taps
- 8 Finishing taps with indicated pitches
- 8 HSS drills 2.5-2.9-3.3-4.2-5-6.8-8.5-10.3mm
- + accessories



TN

NO WARRANTY

TAP & DIE SET (52 PCS)

OM 9222

Contents:

- 7 Dies: M3x0.5-M4x0.7-M5x0.8-M6x1.0-M8x1.25-M10x1.50-M12x1.75
- 5 Threading dies UNF 1/4", 5/16", 3/8", 1/2".
- 2 BSP 1/8", 1/4" dies
- 14 Taps in indicated pitches
- 13 HSS drills: 2.5-3.3-4.2-5-5.5-6.8-6.9-8.5-8.8-9.9-10.3-11.4-11.8mm
- 5 Pigtail extractors N°1-2-3-4-5
- + accessories



TN

NO WARRANTY

TAP & DIE SET (75 PCS)

OM 9223

Contents:

- 18 Thread cutting dies: M2x0.25-M3x0.35-M3x0.5-M3.5x0.6-M4x0.5-M4x0.7-M4.5x0.75-M5x0.5-M5x0.8-M6x0.75-M6x1.0-M8x1.0-m8x1.25-M10x1.25-M10x1.5-M12x1.25-M12x1.75-BSP28 1/8"
- 18 Roughing taps, dimensions see dies
- 18 Finishing taps, dimensions see dies
- 17 HSS drill bits: 1.7-2.5-2.6-2.9-3.3-3.5-3.8-4.2-4.5-5-5.3-6.8-7-8.5-8.8-10.3-10.7mm
- + accessories



TN

NO WARRANTY

5 CARBIDE ROTARY RASPS BOX

OM 0643



Specifications:

- right-hand cut
- diamond teeth
- 6mm cylindrical shanks
- material: carbide

TN

SCREW EXTRACTOR SET + DRILLS (10PCS)

OM 0668



TN

NO WARRANTY



RETHREADING TOOLS

TN

METRICAL INNER/OUTER THREAD FILE 0.8-3.0

OM 9300

Enables internal or external threads to be measured and reshaped by passing over the relevant pitch.

Each side of the comb has a different pitch as follows:
0.80-1.00-1.25-1.50-1.75-2.00-3.00
Length: 230mm



NO WARRANTY

TN

EXTERNAL RETREADING TOOL Ø17-Ø38mm

OM 9309

A single tool for restoring both left-hand and right-hand inch and metric threads!

Small footprint



2 WARRANTY

TN

OM 0486 M5x0.8 INSERT SET

Contents:

- Ø5.2mm drill bit
- tap M5x0.8
- tool for free-standing inserts
- 25 stainless steel inserts

OM 0487 M6x1.0 INSERTS SET

Contents:

- Ø6.3mm drill bit
- tap M6x1.0
- tool for free-standing inserts
- 25 stainless steel inserts

OM 0488 M8x1.25 INSERT SET

Contents:

- Ø8.3mm drill bit
- tap M8x1.25
- tool for free-standing inserts
- 25 stainless steel inserts

OM 0489 M10x1.50 INSERT SET

Contents:

- Ø10.4mm drill bit
- tap M10x1.5
- tool for free-standing inserts
- 25 stainless steel inserts

OM 0490 M12x1.75 INSERT SET

Contents:

- Ø12.4mm drill bit
- tap M12x1.75
- tool for free-standing inserts
- 25 stainless steel inserts



NO WARRANTY

TN



M5-M12 INSERT SET

OM 0450

For repairing worn or damaged threads.

Stainless steel inserts for excellent resistance to breakage, corrosion and temperature.
Set includes inserts from M5 to M12, twist drills, taps, assembly tools and thread breakers.**Contents:**

- twist drills
- taps
- assembly tools
- tongue breaker
- 12 inserts M5x0.8 (OM0452: 25 inserts)
- 12 inserts M6x1 (OM0453: 25 inserts)
- 12 inserts M8x1.25 (OM0454: 25 inserts)
- 12 inserts M10x1.50 (OM0455: 25 inserts)
- 12 inserts M12x1.75 (OM0456: 10 inserts)

OM 0456 10 PCS M12x1.75 INSERT SET

OM 0452 25 PCS M5x0.8 INSERT SET

OM 0453 25 PCS M6x1 INSERT SET

OM 0454 25 PCS M8x1.25 INSERT SET

OM 0455 25 PCS M10x1.50 INSERT SET

OM 0458 10 PCS M14x2.0 INSERT SET

OM 0457 10 PCS M14x125 INSERT SET





FLOOR JACK (MOBILE SERVICE)



REF	OH 6302BL	OH 5304	OH 5311	OH 5309
Vehicle type				
Intensity of use				
Max. load	2T	2T	3T	1.25T
Height min.	135mm	85mm	192mm	85mm
Max. height	340mm	381mm	533mm	375mm
Lowering	braked	braked	braked	braked
Wheel	steel	steel	steel	aluminum/steel
Drive	offset	offset	offset	u-joint
Pump	single piston	single piston	single piston	dual piston
Weight (kg)	8.7	13	19	11.5
Repairability				
Extra flat		.		.
Budget	€	€	€	€€

GARAGE JACK (WORKSHOP)



REF	OH 6303	OH 7014	OH 5355	OH 5360
Vehicle type				
Intensity of use				
Max. load	3T	3T	5T	10T
Height min.	140mm	75mm	150mm	160mm
Max. height	465mm	510mm	560mm	560mm
Lowering	braked	braked	braked	braked
Approach pedal
Wheel	steel	PU	steel	steel
Drive	cardan	cardan	mechanics	mechanics
Pump	double piston	double piston	single piston	single piston
Weight (kg)	30	32.5	87	129
Repairability				
Extra long			.	.
Extra plat		.		
Budget	€€€	€€€	€€€€	€€€€

AIR HYDRAULIC JACK



REF	OH 5000	OH 9021	OH 3015N	OH 9042N	OH 5030N	OH 9032N
Vehicle type						
Intensity of use						
Max. load	22T	30T	30T	40T	50T	30T
Height min.	225mm	150mm	150mm	125mm	150mm	360mm
Max. height	528mm	409mm	289mm	407mm	312mm	777mm
Capacity per floor	22T	30T/15T	30T/15T	40T/22T/10T	50T/30T/15T	30T
Lowering speed control
Transport		Carrying handle + folding handle				
Weight (kg)	33	30.2	38	36	56	87
Repairability						
Budget	€	€	€	€€	€€	€€€



TROLLEY JACKS

TROLLEY JACK 2T

OH 6302BL

Specifications:

- rotating sole
- overload protection
- carrying handle
- h:min: 135mm
- max. height: 340mm
- handle length (bent in 2 parts): 740mm
- dimensions: 447x196x135mm
- weight: 8.7kg

B.LINE
BUDGET SOLUTION

TN

2T

2
WARRANTY

EXTRA FLAT TROLLEY JACK 2T 85mm

OH 5304




Specifications:

- rotating sole
- overload protection
- min. height: 85mm
- max. height: 381mm
- dimensions: 560x212x145mm
- weight: 13kg



HIGH ELEVATION TROLLEY JACK 3T

OH 5311

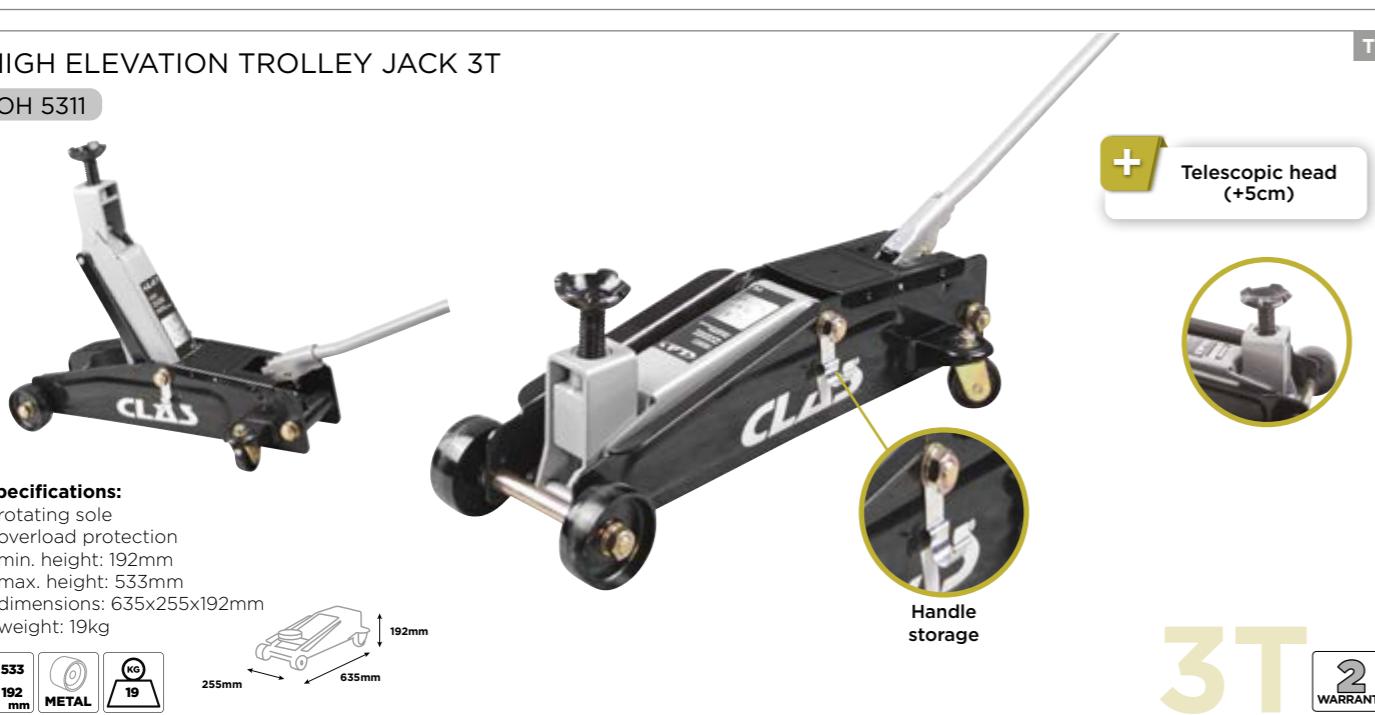

Specifications:

- rotating sole
- overload protection
- min. height: 192mm
- max. height: 533mm
- dimensions: 635x255x192mm
- weight: 19kg






EXTRA FLAT ALUMINUM TROLLEY JACK 1.25T 85mm

OH 5309


Ultra-light,
ultra-flat,

Foam protection



Specifications:

- Aluminum jack
- rubber sole
- overload protection
- dual-pump quick-release system
- foam protection on handle
- pivoting rear wheels
- min. height: 85mm
- max. height: 375mm
- dimensions: 580x240x150mm
- weight: 11.5kg



1.25T

10
WARRANTY




FOOT PEDAL TROLLEY JACK 3T

OH 6303

**Specifications:**

- approach pedal
- overload protection
- double piston
- iron wheels
- min. height: 140mm
- max. height: 490mm
- dimensions: 626x330x167mm
- weight: 29.5kg



SA 6366 PEDAL RETURN SPRING

SA 6365 FIXED WHEEL

SA 6364 COMPLETE JACK

SA 6369 VERIN SPRING

SA 6363 SWIVEL WHEEL

SA 6362 CYLINDER GASKET KIT

SA 6368 CARDAN

**3T** **10** WARRANTY

EXTRA FLAT TROLLEY JACK 3T 75mm

OH 7014



Extra flat



Approach pedal



Dual pump : fast rise



SA 7119 SPRING RETURN HANDLE

SA 7117 COMPLETE CYLINDER

SA 7116 SPRING CYLINDER

SA 7121 RUBBER PAD

SA 7118 FAST APPROACH PEDAL


SA 7114 PAIR OF FRONT WHEELS

SA 7122 CV JOINT

SA 7115 PAIR OF SWIVEL WHEELS

SA 7094 JACK HANDLE

SA 7120 STEEL BASE WITH SCREW AND PAD

**3T** **10** WARRANTY



LONG CHASSIS TROLLEY JACK 5T L.1505mm

OH 5355



TN

Specifications:

- anti-overload system
- controlled descent system
- approach pedal
- ball-bearing front and rear wheels ensure stability and maneuverability
- min. height: 150mm
- max. height: 560mm
- SA5355: pair of swivel wheels
- SA5356: pair of front wheels
- dimensions: 1505x364x200mm
- weight: 87kg



DIMENSIONS

REF	A (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	L (mm)	K (mm)	Long. manche	Ø roues avant	Ø roues arrière
OH 5355	1505	31	31	200	290	364	245	130	1155mm	111mm	70mm
OH 5360	1637	24	24	250	333	490	245	150	1155mm	141mm	90mm

5T



LONG CHASSIS TROLLEY JACK 10T L.1637mm

OH 5360



Approach pedal



Specifications:

- anti-overload system
- controlled descent system
- approach pedal
- ball-bearing front and rear wheels ensure stability and maneuverability
- min. height: 160mm
- max. height: 560mm
- dimensions: 1637x490x250mm
- weight: 129kg



10T

HGV JACK 22T

OH 5000


NEW

3-position handle:
90-45-0° metal
locking systemT-handle: easy
positioning under
the vehicleMetal
identification
plate

22T


Specifications:

- allows you to work quickly and effortlessly
- overload protection
- 1 stage: 22T
- equipped with speed control valve for increased safety
- long T-handle for easy positioning of jack under vehicle
- 3-position handle: 90-45-0° metal locking system
- min. height: without extension 225mm
- h. max: without extension 428mm
- h. max: with extension 528mm
- h without handle: 175mm
- total h with handle: 1400mm
- length: 820mm with handle at 0°, 1430mm in intermediate 45° position and 1800mm in 90° position
- length of frame and wheels: 580mm
- width: 278mm
- extensions: 10-65-100mm
- feed pressure: 7.5-8.5 bar
- weight: 33kg



AIR HYDRAULIC JACK 15-30T


OH 3015N

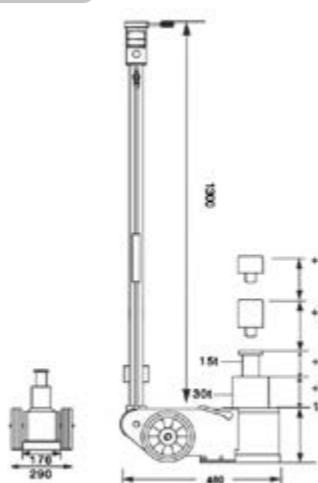3-position handle:
90-45-0° metal
locking systemT-handle: easy
positioning under
the vehicleMetal
identification
plate

30T

Specifications:

- allows you to work quickly and effortlessly
- anti-overload system
- equipped with descent speed control valve for increased safety
- 2 stages: 30-15T
- long T-handle for easy positioning of jack under vehicle
- 3-position handle: 90-45-0° metal locking system
- piston treated for high strength
- extensions: 45-75mm
- supply pressure: 9-12bar
- weight: 38kg



TN



FOLDABLE AIR HYDRAULIC JACK 15-30T

OH 9021

Applications: Trucks, trailers, buses



Specifications:

- carrying handle
- allows you to work quickly and effortlessly
- overload protection
- 2 stages: 30T-15T
- equipped with descent speed control valve for increased safety
- handle divisible into 2 parts
- folding handle becomes a carrying handle
- remote control unit for use with or without 2nd handle section
- angled frame cut-out for easy handling
- rubber wheels
- min. height: without extension 150mm/with extension 270mm
- max. height: without extension 289mm/with extension 409mm
- length: 503mm
- width: 280mm
- extensions: Ø67mm L.45-75mm, Ø25mm spigot
- supply pressure: 9-12bar
- weight: 30.2kg



+
Special troubleshooting
Lightweight and ultra-compact

30T


AIR HYDRAULIC JACK 10-22-40T

OH 9042N

Applications: Truck, trailer, bus, farm machinery, public works.



Specifications:

- allows you to work quickly and effortlessly
- overload protection
- 3 stages: 40-22-10T
- equipped with lowering speed control valve for added safety
- long T-handle for easy positioning of jack under vehicle
- 3-position handle: 90-45-0° metal locking system
- piston treated for high strength
- min. height: without extension 125mm/with extension 256mm
- max. height: without extension 276mm/with extension 407mm
- length: 527mm
- width: 268mm
- extensions: 11-45-75mm
- supply pressure: 9-12bar
- weight: 38.4kg

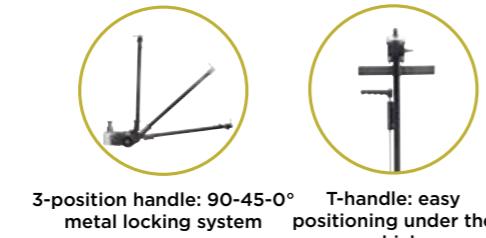**+**
Low profile**40T**

AIR HYDRAULIC JACK 15-30-50T

OH 5030N

3-position handle:
90-45-0° metal
locking systemT-handle: easy
positioning unde
r the vehicleMetal
identification plate**50T**

HIGH LIFT AIR HYDRAULIC JACK 30T

OH 9032N

Applications: Public works, agricultural machinery, military machinery, trains.




+
Maintaining power at
high elevations

Metal
identification plate**30T**

Specifications:

- allows you to work quickly and effortlessly
- anti-overload system
- equipped with a lowering speed control valve for added safety
- long T-handle for easy positioning of jack under vehicle
- 3 positions: 90-45-0° metal locking system
- min. height: without extension 360mm/with extension 505mm
- max. height: without extension 627mm/with extension 772mm
- length: 840mm
- width: 282mm
- extensions: 45-100mm
- supply pressure: 9-12bar
- weight: 87kg

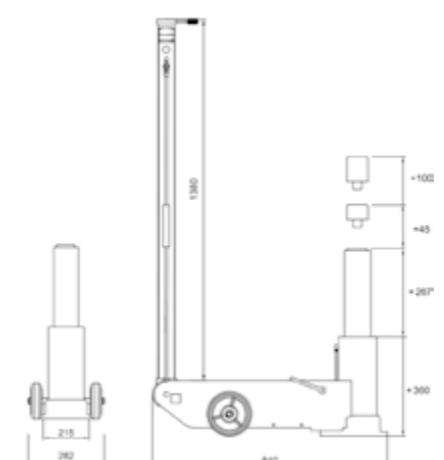



PNEUMATIC JACKS

PNEUMATIC FLOOR JACK 2T-2 STAGES

OP 0209

New internal structure for greater stability, telescopic guide.




+ Fast, effortless ascent



PNEUMATIC FLOOR JACK 2T-3 STAGES

OP 0309

New internal structure for greater stability, telescopic guide.



EXTENSION L.60mm

SA 9131


Accessoire de OP 0209/OP 0309

Specifications:
• Ø lug: 90mm

PNEUMATIC FLOOR JACK 2T-3 STAGES

OP 0309

New internal structure for greater stability, telescopic guide.



EXTENSION L.80mm

SA 9132

Accessoire de OP 0209/OP 0309

Specifications:
• Ø lug: 90mm

BOTTLE JACKS

+ Robust & airtight
thanks to the welded base

REF	DESIGNATION	Min. height (mm)	Max. height (mm)	Weights	Base	Max. load (T)	Transport handle	Adjustable sole
OH 4502	BOTTLE JACK 2T	193	373	3 kg	110x103mm	2	Non	0-60
OH 4504	BOTTLE JACK 4T	210	415	4 kg	122x115mm	4	Non	0-70
OH 4506	BOTTLE JACK 6T	230	440	6,5 kg	140x126mm	6	Non	0-60
OH 4512	BOTTLE JACK 12T	275	440	12,2 kg	169x153mm	12	Oui	0-60
OH 4520	BOTTLE JACK 20T	275	440	12,2 kg	169x153mm	20	Oui	0-60
OH 4530	BOTTLE JACK 30T	275	440	12,2 kg	169x153mm	20	Oui	0-60
OH 4550	BOTTLE JACK 50T	181	345	25 kg	99x93mm	50	Oui	0-48

2-50T






JACK STANDS

Load
stabilization

Safety pin

REF	DESIGNATION	Min. height (mm)	Max. height (mm)	Weight	Max. load (T)
OM 3002BL	PAIR OF 2T JACK STANDS WITH SECURITY PIN	268mm	418mm	4.8 kg	2
OM 3030	PAIR OF 3T JACK STANDS WITH SECURITY PINS	276mm	420mm	6.4 kg	3
OM 3060	PAIR OF 6T JACK STANDS WITH SECURITY PINS	388mm	588mm	14 kg	6

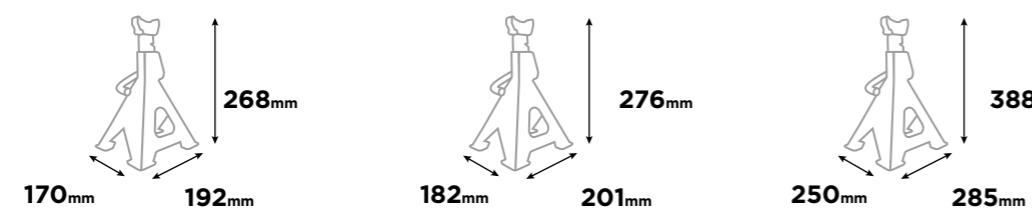

OM 3030 JACK STAND RUBBER PAD


EG 1157

2-6T

2 WARRANTY

PAIR OF 10T JACK STANDS

OM 3100



10T

2 WARRANTY

TELESCOPIC PIT JACK 750 KG

OH 0280



750 KG

2 WARRANTY

PAIR OF MOBILE 20T PIN JACKS

OM 0694



20T


2 WARRANTY

JACK STANDS WITH SCREW 20T (x2)

OM 3021

Specifications:

- min. height: 410mm
- max. height: 600mm
- base plate: 330mm-330mm
- weight: 56kg

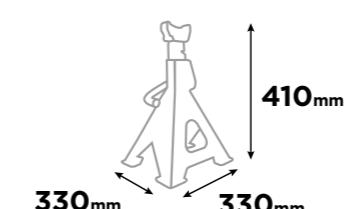


20T JACK STANDS WITH SCREW HIGH ELEVATION

OM 3023

Specifications:

- min. h.: 665mm
- max. height: 1190mm
- base plate: 460x460mm
- weight: 76kg



20T


2 WARRANTY



PIT JACKS

PIT JACK 300kg

OH 0273

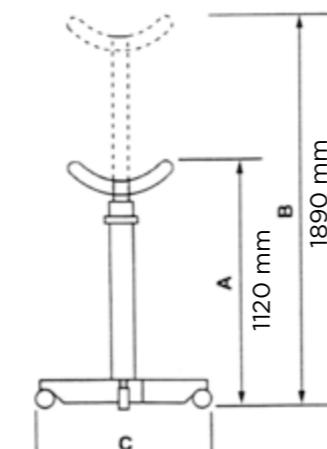
 Dead man's descent


REF	Capacité	A (mm)	B (mm)	C (mm)	Poids
OH 0273	300kg	1120	1890	800	23kg

Specifications:

- foot-operated
- 28 mm diameter chrome-plated piston
- overload protection
- down control: dead man type
- 4 swivel wheels




300 KG



PIT JACK 600kg

OH 0286

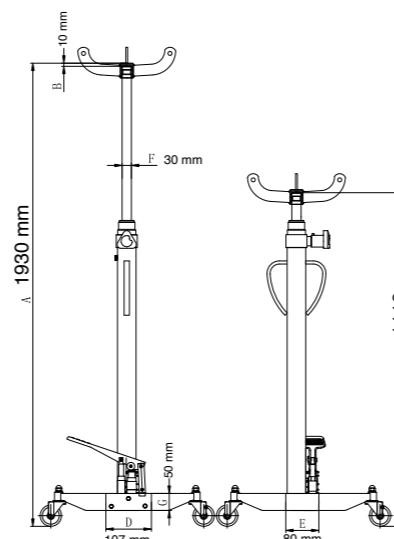
 Dead man's descent
**Specifications:**

- foot-operated
- 30mm-diameter chrome-plated piston
- 600mm wheelbase
- overload protection
- down control: dead man type
- 4 swivel wheels, 2 with brakes




600 KG



PIT JACK 1T

OH 0285

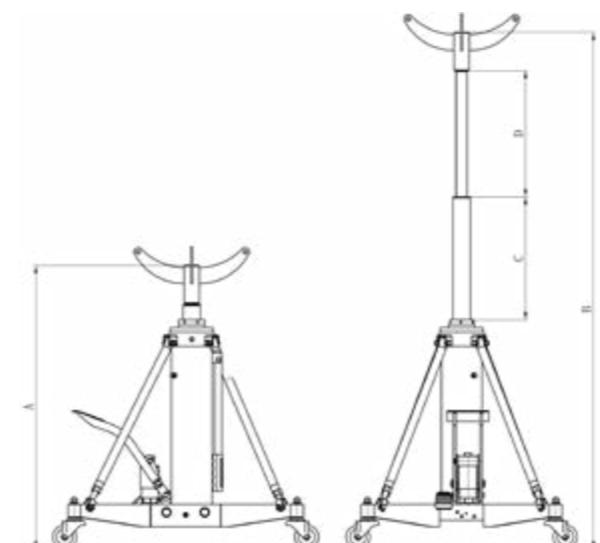

REF	A (mm)	B (mm)	C (mm)	D (mm)
OH 0285	888	1888	490	510

Specifications:

- foot-operated
- 30mm diameter of free-standing end. 35mm cylinder rod diameter.
- wheelbase length 780mm and width 630mm.
- Fast pedal: 15mm rise with each pedal stroke.
- overload protection
- down control: deadman type
- supplied with removable head and pad
- 4 swivel wheels, 2 with brakes



1T




 Low lift, double deck

SWIVEL HEAD JACKS 600kg

OH 0250

Accessoire de OH 0286/ OH 0285

**Specifications:**

- dimensions: 490x440x300mm
- table top: 360x270mm
- Tilt angle: Right: $\geq 10^\circ$
- Tilt angle: Left: $\geq 20^\circ$
- Tilt angle: Front: $\geq 24^\circ$
- Tilt angle: Rear: $\geq 19^\circ$
- fitting: Ø30mm
- chain length: 934mm
- weight: 21kg



600 KG



PIT JACK 600kg + SWIVEL HEAD

OH 0267


Contents:

- OH0286: pit jack 600Kg
- OH0250: swivel head 600Kg jacks




600 KG





1T FOLDABLE CRANE

OH 0336BL

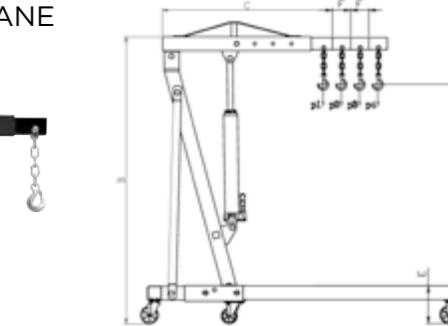

REF	Capacité Capacity	A (mm)	B (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	P1 (kg)	P2 (kg)	P3 (kg)	P4 (kg)
OH 0336BL	1T	1608	1435	420-1960	180	92	760	834	1000	750	500	250

Max. T
1 1960
420 mm
KG 65

Specifications:

- lifting capacity: 0-2060mm
- 4-position arm: 1000-750-500-250kg
- foot height: 185mm
- 6 swivel wheels

B.LINE
BUDGETSOLUTION


1T
2
WARRANTY

1T LOW PROFILE FOLDABLE CRANE

OH 0335



+ Extra plate

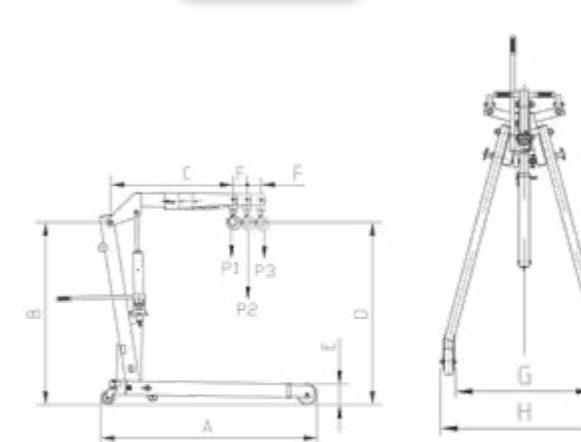

REF	Capacité Capacity	A (mm)	B (mm)	C (mm)	D1 (mm)	D2 (mm)	D3 (mm)
OH 0335	1T	1380	1600	1085	245-2330	100-2415	0-2500

E (mm)	F (mm)	G (mm)	H (mm)	P1 (kg)	P2 (kg)	P3 (kg)
85	100	865	970	1000	750	500

Specifications:
 • double-acting pump
 • 360° rotating pump
 • deadman descent
 • 3-position arm: 1000-800-700kg
 • extra flat: 85mm
 • nylon wheels
 • weight: 71kg

Max. T
2 2500
245 mm
EXTRA FLAT
0.7T
0.8T
1T NYLON
KG 71

1T
2
WARRANTY

1T FOLDABLE PALLET CRANE

OH 1101

NEW






+ Space saving



Specifications:

- 3-position arm: 1000-800-700kg
- double-acting pump
- weight: 128kg

Max. T
2 2500
175 mm
1.5T
1.7T
2T NYLON
KG 149

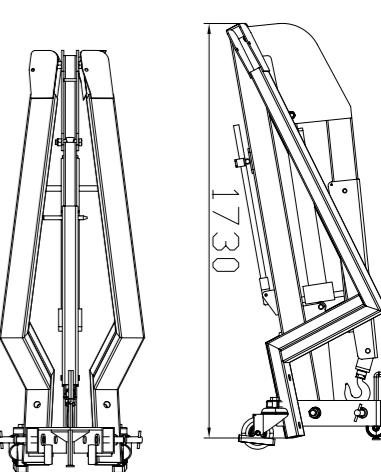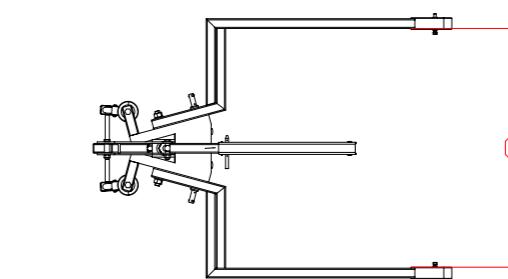

1T
2
WARRANTY


2T FOLDABLE CRANE

OH 0338

NEW

Specifications:

- double-acting pump
- deadman descent
- 360° rotating pump
- 3-position arm: 2000-1700-1500kg
- max load lift: 255cm
- net weight: 149kg
- nylon wheels

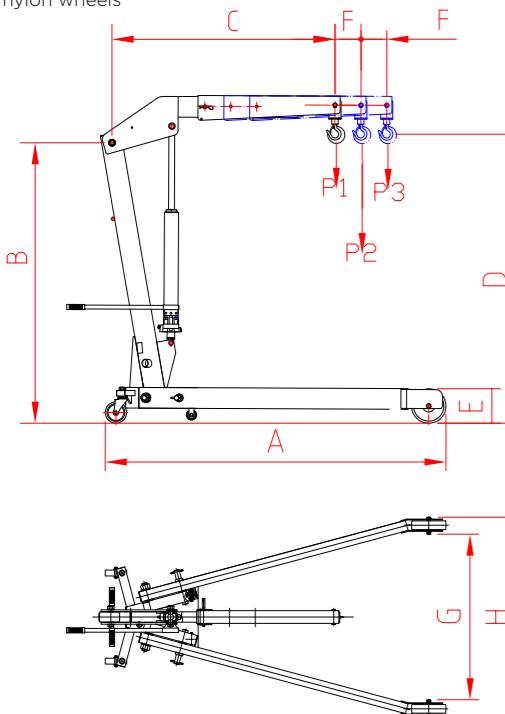

Model	Capacity	A (mm)	B (mm)	C (mm)	D1 (mm)	D2 (mm)	D3 (mm)	E (mm)	F (mm)	G (mm)	H (mm)	P1 (kg)	P2 (kg)	P3 (kg)	G.W. (kg)	N.W. (kg)
OH 0338	2000KG	2012	1645	1290	230-2505	80-2630	0-2705	205	150	994	1158	2000	1700	1500	174KGS	148KGS

Max. T	2	2550	1.5T	1.7T	2T
		175 mm	(KG)	(KG)	(KG)

2T



1T CHARGE BALANCER FOR VEH BATTERY

OH 0271

NEW

This tool is an indispensable aid for moving and handling electric vehicle batteries. Its four straps ensure load stability by distributing the weight.



OH 0265 50CM TEXTILE SLING

Contents:

- 1 main bar
- 2 crossbars
- 4 textile slings with eyebolts at each end
- 1 top hook for lifting

Max. T	1
--------	---

1T



DRUM GRIP 350kg

OH 0009



Specifications:

- for plastic and metal drums weighing up to 350kg
- max. opening 580mm

Max. T	10
--------	----

Max. T	15
--------	----

350KG



LOAD BALANCER 680kg

OH 0238



Specifications:

- length: 400mm
- usable stroke: 350mm
- height: 50mm
- thickness: 12mm
- worm Ø: 15.8mm
- weight: 5.6kg

Max. Kg	680
---------	-----

(KG)	5.6
------	-----

680KG




LIFTING TABLES

500kg HYDRAULIC LIFT TABLE

OH 1300

Ideal for handling and working on parts (gearboxes, engines, lifts, batteries, etc.).

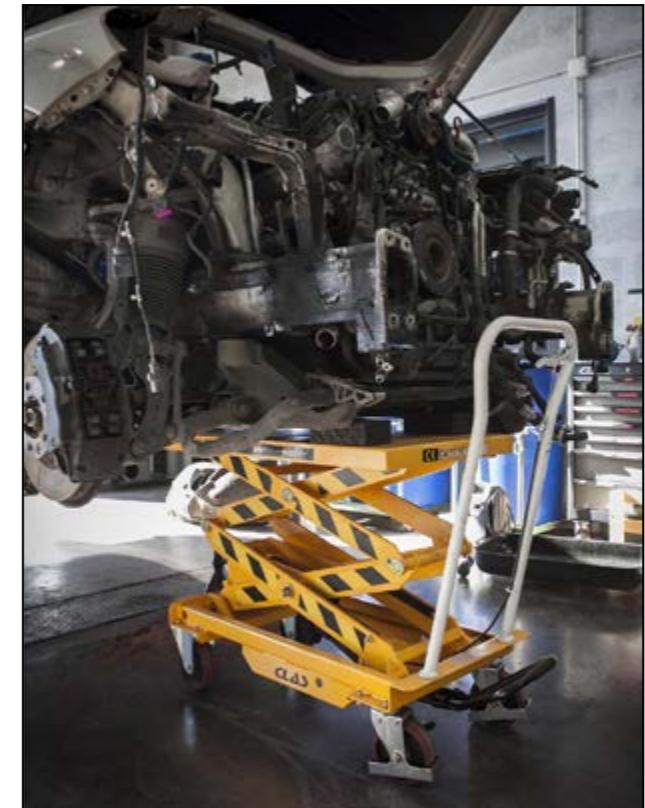

L (mm)	W (mm)	D (mm)	H (mm)	H1 (mm)
1010	520	150	440	1575

Specifications:

- hydraulic lift control via foot pedal
- deadman lowering control
- platform dimensions: 1010x520mm
- 2 fixed and 2 swivel wheels with protective covers and brakes
- min. height: 440mm
- max. height: 1575mm
- weight: 144kg

1575 mm	520 mm	1010 mm	440 mm
---------	--------	---------	--------



500KG





LIFTING TABLE 1200kg FOR EV BATTERY AND HEAVY ORGANS

OH 1201

This table is specially designed for the precise removal and re-installation of heavy components up to 1.2T max load (electric vehicle battery and/or powertrain).

Versatile, it can be adapted to all your needs thanks to its numerous settings and optional supports.

A hydropneumatic control system enables effortless, fast and precise height adjustment.

Descent is secured by a "deadman" function requiring 2 simultaneous actions by the operator. In the event of a problem involving the operator, this function is automatically stopped. The platform is fully mobile in relation to its frame, and features 96 M10x1.5 drilled and tapped points, evenly distributed to accommodate various accessories (available on request).

Specifications:

- length: 1860mm
- width: 790mm
- minimum platform height: 710mm
- maximum tray height: 2090mm
- minimum tray length: 1380mm
- maximum platter length: 1580mm
- rise time: +/-50s
- lowering time: +/-30s
- 4 swivel castors with brakes: 130mm
- 4 handles positioned around the table for optimum ease of use when adjusting the load at rest.

Adjustments:

- the table top unfolds into three lockable positions for a maximum surface area of 1560mmx730mm. It is tapped M10x1.5 to accommodate various accessories (available on request).
- the table's flatness can be adjusted at 2 points for high positioning accuracy
- the table top can be moved in translation and pivoted for greater precision when repositioning elements.

Max. T
1.2T
2090
710 mm
GUM

Precision and maneuverability

NOTE

Technical information on lifting page 450

TE



CO 1160

SET OF 12 ADJUSTABLE ROUND RUBBER FOR LIFT TABLE 50mm

CO 1161

SET OF 6 ADAPTABLE SUPPORTS FOR EV BATTERY LIFT TABLE

1.2T

2 WARRANTY

	DESIGNATION	REF	
	RECTANGULAR RUBBER PAD 160x120x30mm	EG 1137	
	PAD FIAT 500E/500X/JEEP RENEGADE Ø100 X H.55	EG 1154	
	UNIVERSAL REVERSIBLE RUBBER PAD JACK	EG 1155	
	JACK RUBBER PAD BMW/MINI/OPEL	EG 1156	
	OM 3030 JACK STAND RUBBER PAD	EG 1157	

	ROUND RUBBER PAD Ø120x26mm	EG 1139	111 mm	120 mm	Compatible Ravaglioli	
	ROUND RUBBER PAD Ø124x26mm	EG 1141	108 mm	124 mm	Compatible ATH, Ravaglioli, Werther	
	ROUND RUBBER PAD Ø140x27mm	EG 1145	133 mm	140 mm	Compatible OMCN	
	REINFORCED ROUND RUBBER PAD (METALLIC PLATE) Ø125x24mm	EG 1147	120 mm	125 mm	Compatible Nussbaum, AMI	
	ROUND RUBBER PAD Ø130x10mm	EG 1148	125 mm	130 mm	Compatible Ravaglioli, Siro, Space	



PRESS SHOP



20T HYDRO-PNEUMATIC PRESS

OH 1021

NEW

Specifications:

- hydraulic pump
- manual override
- piston with adjustment screw
- table height adjustable to 14 positions
- polycarbonate guard protects operator from splinters
- table held in place by 2 oversized pins
- large pressure gauge
- reversible V-shaped support block, punch kit and polycarbonate protection included.



20T

2 WARRANTY

HYDRO-PNEUMATIC PRESS 30T SLIDING CYLINDER

OH 1031

NEW



Specifications:

- hydraulic pump
- manual override or hydropneumatic foot pedal
- chrome-plated piston with adjustment screw
- sliding cylinder with handle
- polycarbonate guard protects operator from splinters
- table height adjustable to 14 positions
- table raising/lowering assisted by winch
- table held in place by 2 oversized pins
- large pressure gauge
- reversible V-shaped support block, punch kit and polycarbonate guard included.

Max. T
30

30T

2 WARRANTY

HYDRO-PNEUMATIC PRESS 50T SLIDING CYLINDER

OH 1051

NEW



50T

2 WARRANTY



PRESS SHOP

◀ FIND ALL PRESS SHOP RANGE HERE

TN



100T ELECTRO-HYDRAULIC PRESS

OH 1010

NEW

SPECIFICATIONS:

- ELECTRO-HYDRAULIC PUMP
- CHROME-PLATED PISTON WITH ADJUSTMENT SCREW
- SLIDING CYLINDER WITH HANDLE AND POSITIONING SCALE
- POLYCARBONATE GUARD PROTECTS OPERATOR FROM SPLINTERS
- 14-POSITION ADJUSTABLE TABLE HEIGHT
- TABLE RAISING/LOWERING ASSISTED BY WINCH
- TABLE HELD IN PLACE BY 2 OVERSIZED PINS
- LARGE PRESSURE GAUGE
- REVERSIBLE V-SHAPED SUPPORT BLOCK, PUNCH KIT AND POLYCARBONATE GUARD INCLUDED.

Comes with
polycarbonate
protection



ELECTRO-HYDRAULIC



SA 9944 INSTALLATION OF PRESS EQUIPMENT

TN

100T



PRESS ACCESSORIES

REF	DESIGNATION
OH 0833	UNIVERSAL 20-30T PRESS SUPPORT STRUCTURE
OH 0810	PUNCHER TOOLS



BEARING FORK SEAL INSTALLATION/EXTRACTION KIT

OM 3419

TN

Contents:

- 50 cups Ø18 to Ø74mm
- 1 cup holder: 18mm
- 1 extension: 220mm

